

Product Description

Use high-performance COB LED, Ra>80. Aluminum heatsink and unique die casting heatsink design ensure better heat dissipation.

Luminaire

Structure	Adjustable Down Light LED
Model No.	IBSP104S-EB
Wattage	8W 10W 15W 28W
Luminous Flux	640lm 800lm 1200lm 2240lm
Beam	15° 24° 38° 45°
IP Ratings	IP65
Material	Die-casting alu. trim and heatsink, PMMA. lens
Finish	Matt white or black trim

Installation

Suitable for 5~18 mm thick ceiling board

LEDs


Brand	Bridgelux Cree
Type	COB
Color Temp	2700K 3000K 3500K 4000K 5000K 5700K 6500K
CRI	80 90

Control Gear



Remote constant current LED driver

Brand	Lifud Eaglerise BOKE
Input Voltage	220~240Vac 100-240Vac
Dimming	Non Dim Dim
Remarks	Flicker-free,PF 0.5 0.9

Photometrics



Ra>80

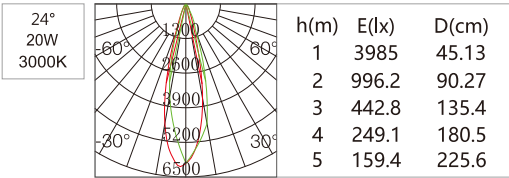


Job/Project _____
Location _____
Fixture Ref. _____
Quantity _____
Remarks _____

Picture



Line art

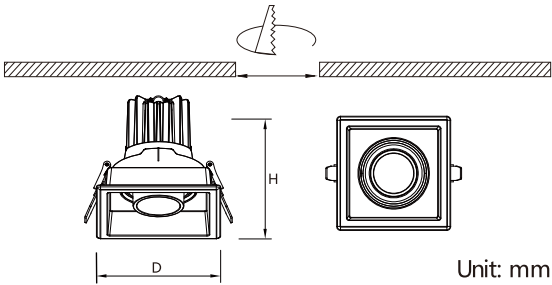

Unit: mm

Model	Watts	D xH(mm)	Cutout(mm)
IBSP104SCT080-EB	8W	L88×W88×H85mm	L80×W80mm
IBSP104SCT080H86-EB	15W	L88×W88×H86mm	L80×W80mm
IBSP104SCT095H78-EB	10W	L106×W106×H78mm	L95×W95mm
IBSP104SCT095H98-EB	15W	L106×W106×H98mm	L95×W95mm
IBSP104SCT095H124-EB	28W	L106×W106×H124mm	L95×W95mm
IBSP104SCT120-EB	28W	L129×W129×H98mm	L120×W120mm