

Job/Project _____

Location _____

Fixture Ref. _____

Quantity _____

Remarks _____

Product Description

Use high-performance SMD LED, Ra>80. Aluminum heatsink and unique die casting heatsink design ensure better heat dissipation.

Luminaire

Structure	Fixed Down Light LED
Model No.	IBDL226S
Wattage	20W 35W 42W
Luminous Flux	> 2000lm 3500lm 4200lm
Beam	80°
IP Ratings	IP20 IP54
Material	Die-casting alu. trim and heatsink, PMMA. lens
Finish	Matt white or black trim

Installation

Suitable for 5~18 mm thick ceiling board


LEDs

Brand	Osram Sanan
Type	SMD
Color Temp	2700K 3000K 3500K 4000K 5000K 5700K 6500K
CRI	80 90


Control Gear

Remote constant current LED driver	
Brand	Lifud Eaglerise OEM
Input Voltage	220~240vac 100-240Vac
Dimming	Non Dim Dim
Remarks	Flicker-free,PF 0.5 0.9

Photometrics




Ra>80



Picture



Line art

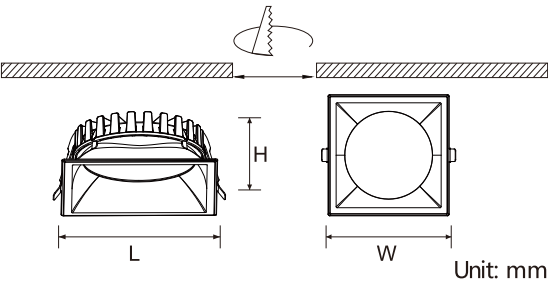

Unit: mm

Model	Watts	D xH(mm)	Cutout(mm)
IBDL226CT115	20W	L129×W129×H69	L115×W115
IBDL226CT115-CCT	20W	L129×W129×H69	L115×W115
IBDL226CT175	35W	L190×W190×H74	L170×W170
IBDL226CT175-CCT	35W	L190×W190×H74	L170×W170
IBDL226CT200	42W	L220×W220×H84	L200×W200
IBDL226CT200-CCT	42W	L220×W220×H84	L200×W200