

Report No.:

Test Time: 2024/4/24 11:47:52

## LUMINAIRE PHOTOMETRIC TEST REPORT

### Luminaire Property

Manufacturer: InBright  
Luminaire Type: IBSP104CT120-60°-28.9W  
Lamp Type:  
Luminous Width: 108 mm  
Luminous Length: 108 mm  
Luminous Height: 104 mm


Voltage(V): 219.80 V  
Current(A): 0.1380 A  
Power(W): 28.87 W  
Power Factor: 0.9450  
Lamp Luminous Flux: 2907.18

### Photometric Results


CIE Class: Direct  
Luminaire Luminous Flux: 2907.184 lm  
Downward Ratio: 100.00%  
Luminaire Efficacy Rating(LER): 100.70 lm/W  
Beam Angle(50%) C0-180,C90-270: 62.2,62.2  
Field Angle(10%) C0-180,C90-270: 79.3,79.0  
S/MH C0-180,C90-270: 1.019,0.933

Max. Intensity: 2983.66 cd  
Max.Intensity Angle: C=90 Gamma=9  
Upward Ratio: 0.00%  
Efficacy: 100.00%  
Center Intensity: 2924.40 cd  
Effective Luminous Flux: 2645.75 lm  
ERP( $\phi$ use)(120deg): 2826.49 lm

Picture of Luminaire



Luminous Intensity Distribution Curve

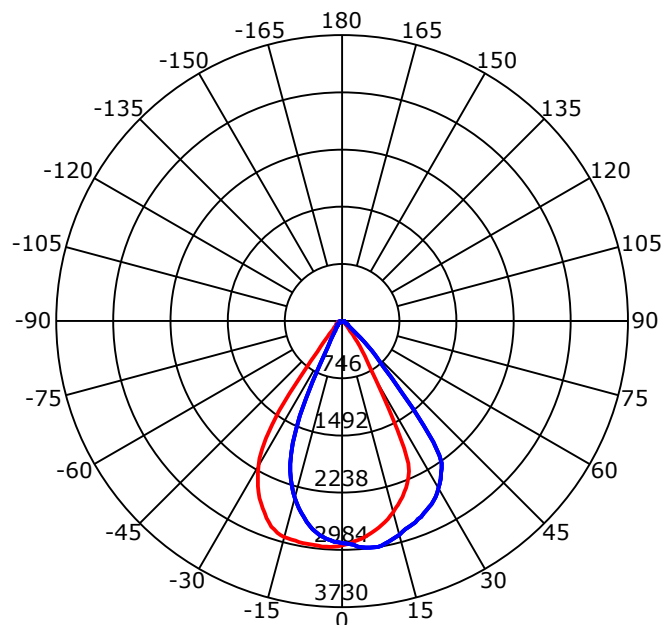

Beam Angle(50%) C0-180,C90-270: 62.2 deg,62.2 deg

C0-180 — C90-270 —


C Range: 0 - 360 Deg  
C Interval: 45.0 Deg  
Test Speed: High  
Temperature: 25  
Operators: QC01  
Test Date: 2024/4/24 11:47:52

G Range: 0 - 90 Deg  
G Interval: 1.0 Deg  
Test System: Huipu CPM-1600B Goniophotometer  
Humidity: 60  
Test Distance: 6.81 m  
Remarks:

Report No.:

Test Time: 2024/4/24 11:47:52

## Luminous Intensity Distribution Curve

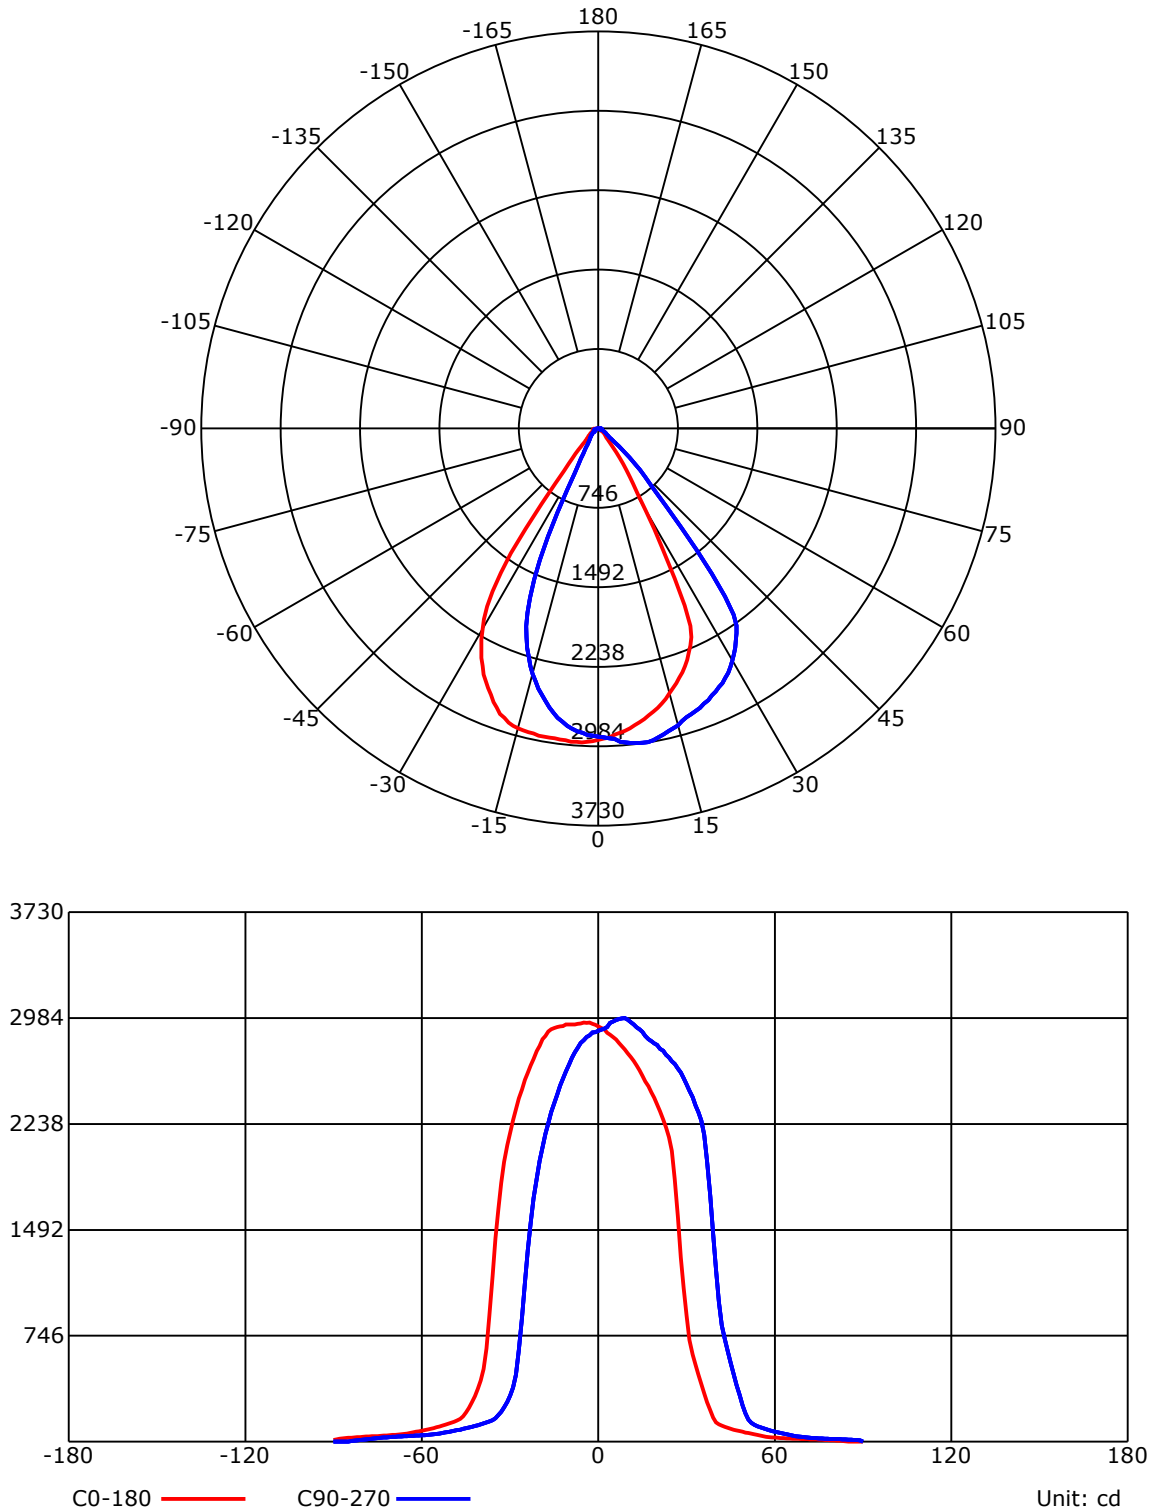


C Range: 0 - 360 Deg  
C Interval: 45.0 Deg  
Test Speed: High  
Temperature: 25  
Operators: QC01  
Test Date: 2024/4/24 11:47:52

G Range: 0 - 90 Deg  
G Interval: 1.0 Deg  
Test System: Huipu CPM-1600B Goniophotometer  
Humidity: 60  
Test Distance: 6.81 m  
Remarks:

Report No.:

Test Time: 2024/4/24 11:47:52

## Luminous Intensity Distribution Curve

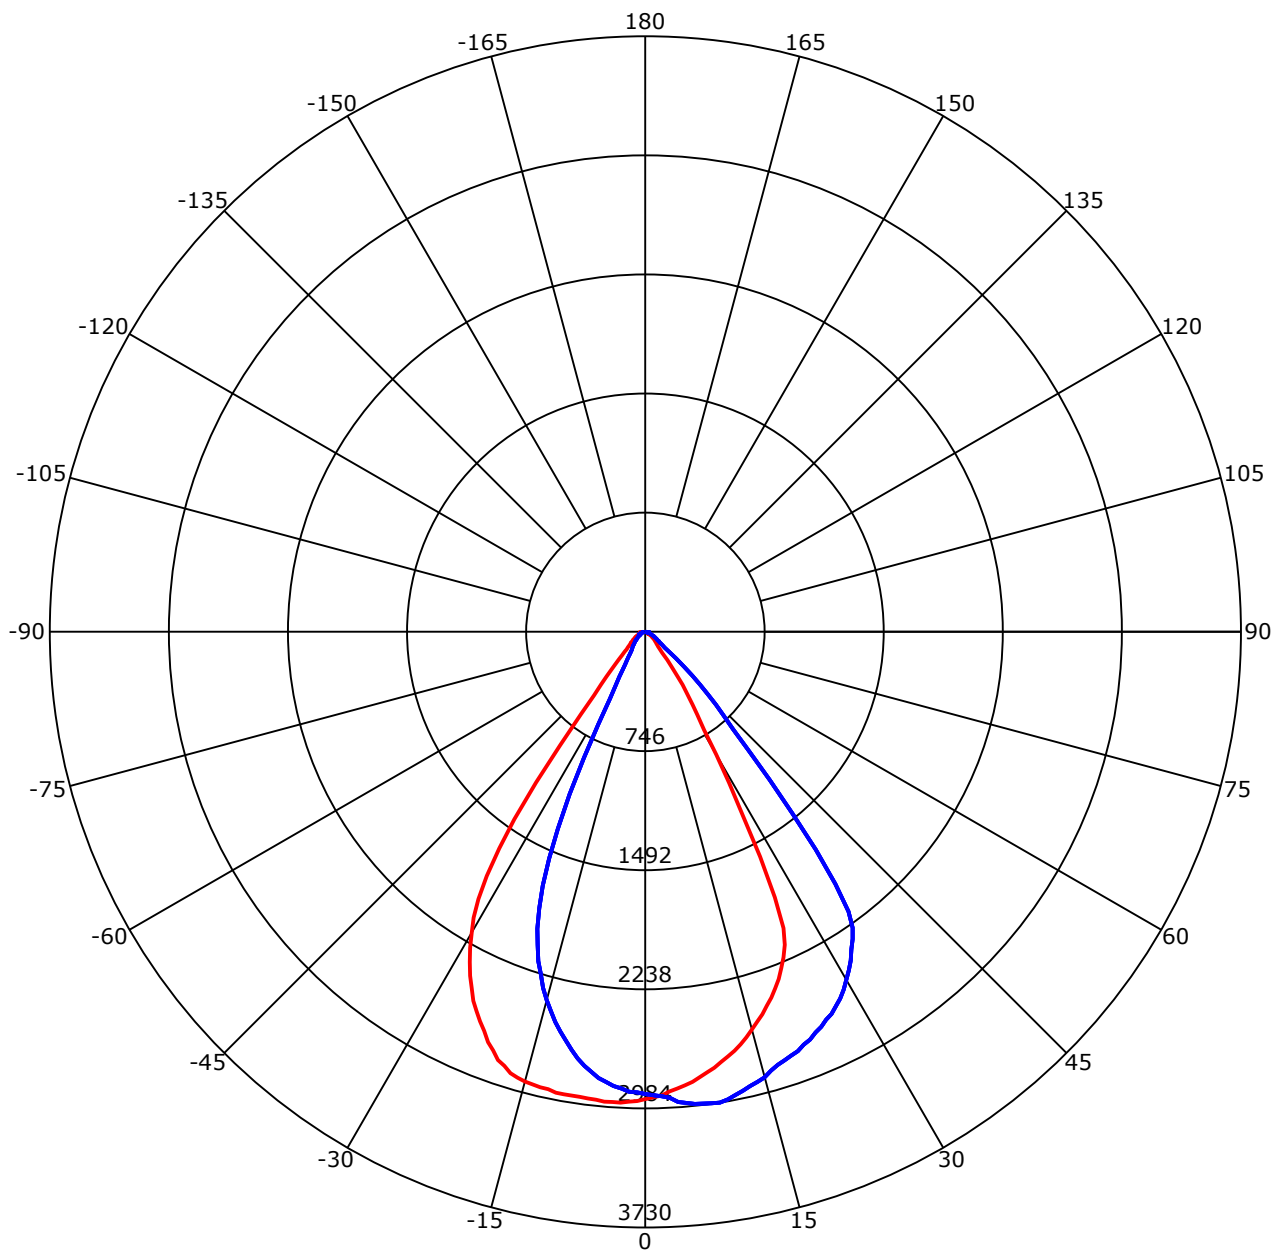

C0-180 — C90-270

Unit: cd/klm


C Range: 0 - 360 Deg  
C Interval: 45.0 Deg  
Test Speed: High  
Temperature: 25  
Operators: QC01  
Test Date: 2024/4/24 11:47:52

G Range: 0 - 90 Deg  
G Interval: 1.0 Deg  
Test System: Huipu CPM-1600B Goniophotometer  
Humidity: 60  
Test Distance: 6.81 m  
Remarks:

Report No.:

Test Time: 2024/4/24 11:47:52

## ISOCANDELA DIAGRAM (SPHERE)

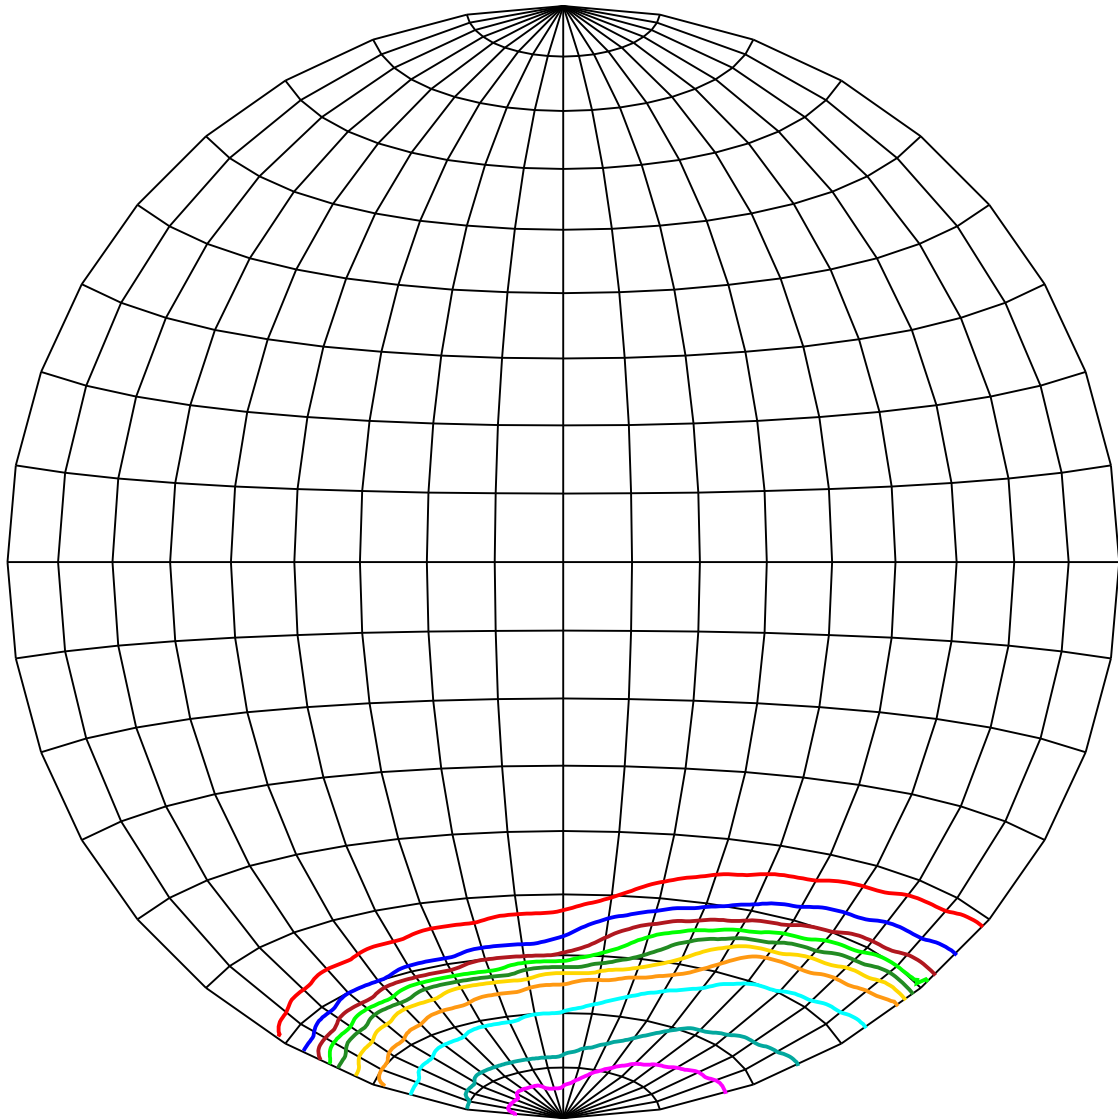

Unit of intensity:cd    I<sub>max</sub>(100%): 2983.659 cd

|                                |                                |
|--------------------------------|--------------------------------|
| 2834.476(95%I <sub>max</sub> ) | 1491.829(50%I <sub>max</sub> ) |
| 2685.293(90%I <sub>max</sub> ) | 1193.464(40%I <sub>max</sub> ) |
| 2386.927(80%I <sub>max</sub> ) | 895.098(30%I <sub>max</sub> )  |
| 2088.561(70%I <sub>max</sub> ) | 596.732(20%I <sub>max</sub> )  |
| 1790.195(60%I <sub>max</sub> ) | 298.366(10%I <sub>max</sub> )  |


C Range: 0 - 360 Deg  
C Interval: 45.0 Deg  
Test Speed: High  
Temperature: 25  
Operators: QC01  
Test Date: 2024/4/24 11:47:52

G Range: 0 - 90 Deg  
G Interval: 1.0 Deg  
Test System: Huipu CPM-1600B Goniophotometer  
Humidity: 60  
Test Distance: 6.81 m  
Remarks:

Report No.:

Test Time: 2024/4/24 11:47:52

## ISOLX DIAGRAM

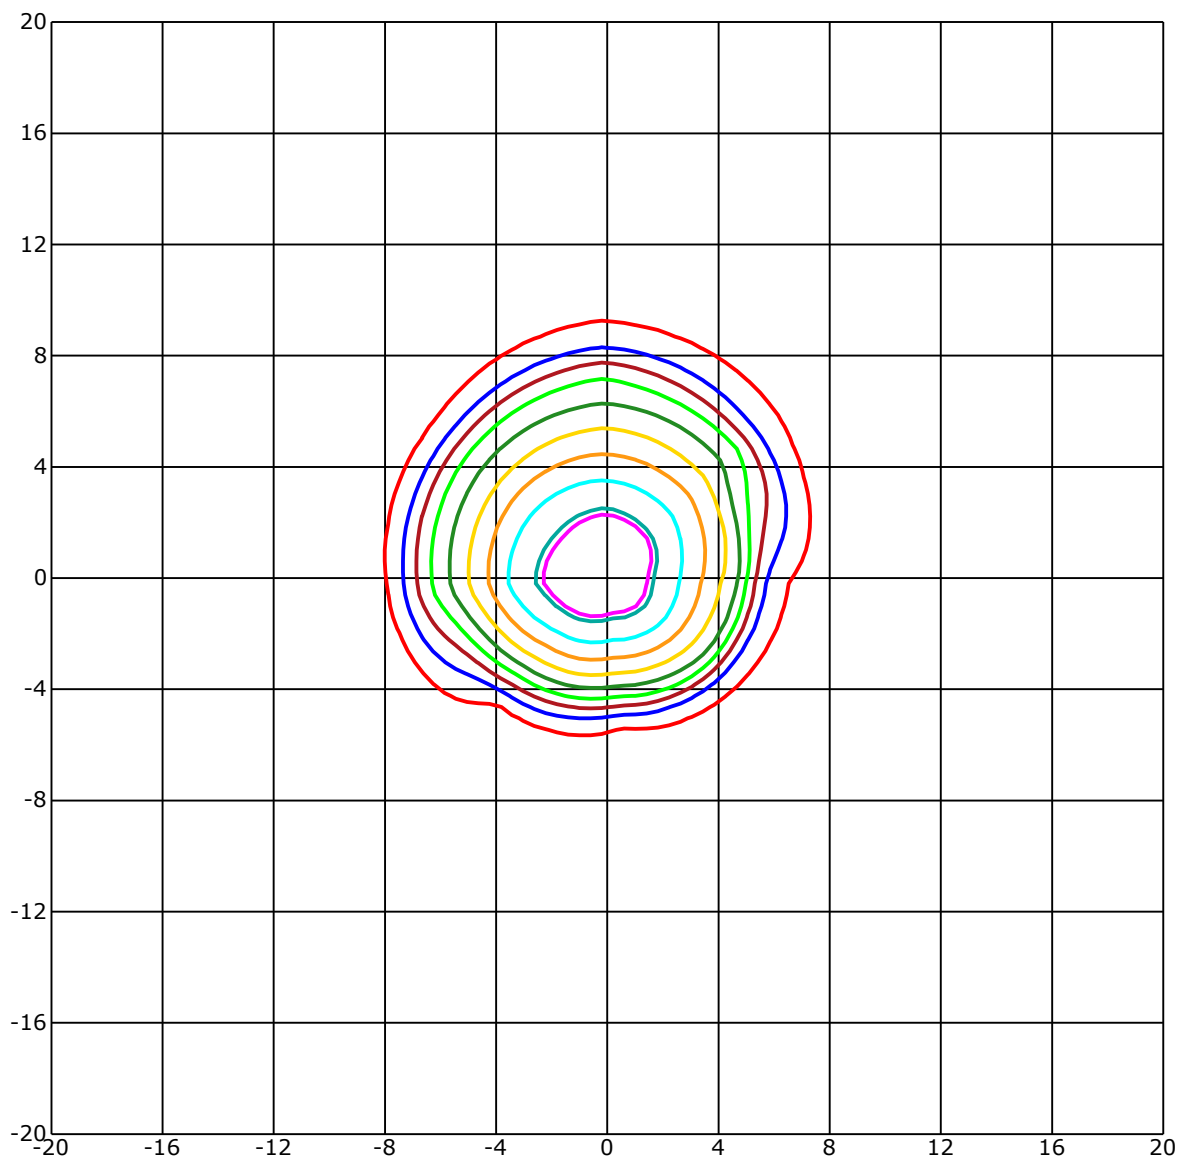

Unit of illumination:lx      Height of plane:10.0(m)/32.81(ft)

|                 |                 |
|-----------------|-----------------|
| 27.095(92%Emax) | 14.725(50%Emax) |
| 26.506(90%Emax) | 11.78(40%Emax)  |
| 23.561(80%Emax) | 8.835(30%Emax)  |
| 20.616(70%Emax) | 5.89(20%Emax)   |
| 17.67(60%Emax)  | 2.945(10%Emax)  |


C Range: 0 - 360 Deg  
C Interval: 45.0 Deg  
Test Speed: High  
Temperature: 25  
Operators: QC01  
Test Date: 2024/4/24 11:47:52

G Range: 0 - 90 Deg  
G Interval: 1.0 Deg  
Test System: Huipu CPM-1600B Goniophotometer  
Humidity: 60  
Test Distance: 6.81 m  
Remarks:

Report No.:

Test Time: 2024/4/24 11:47:52

## UTILIZATION FACTOR DIAGRAM (ROAD)

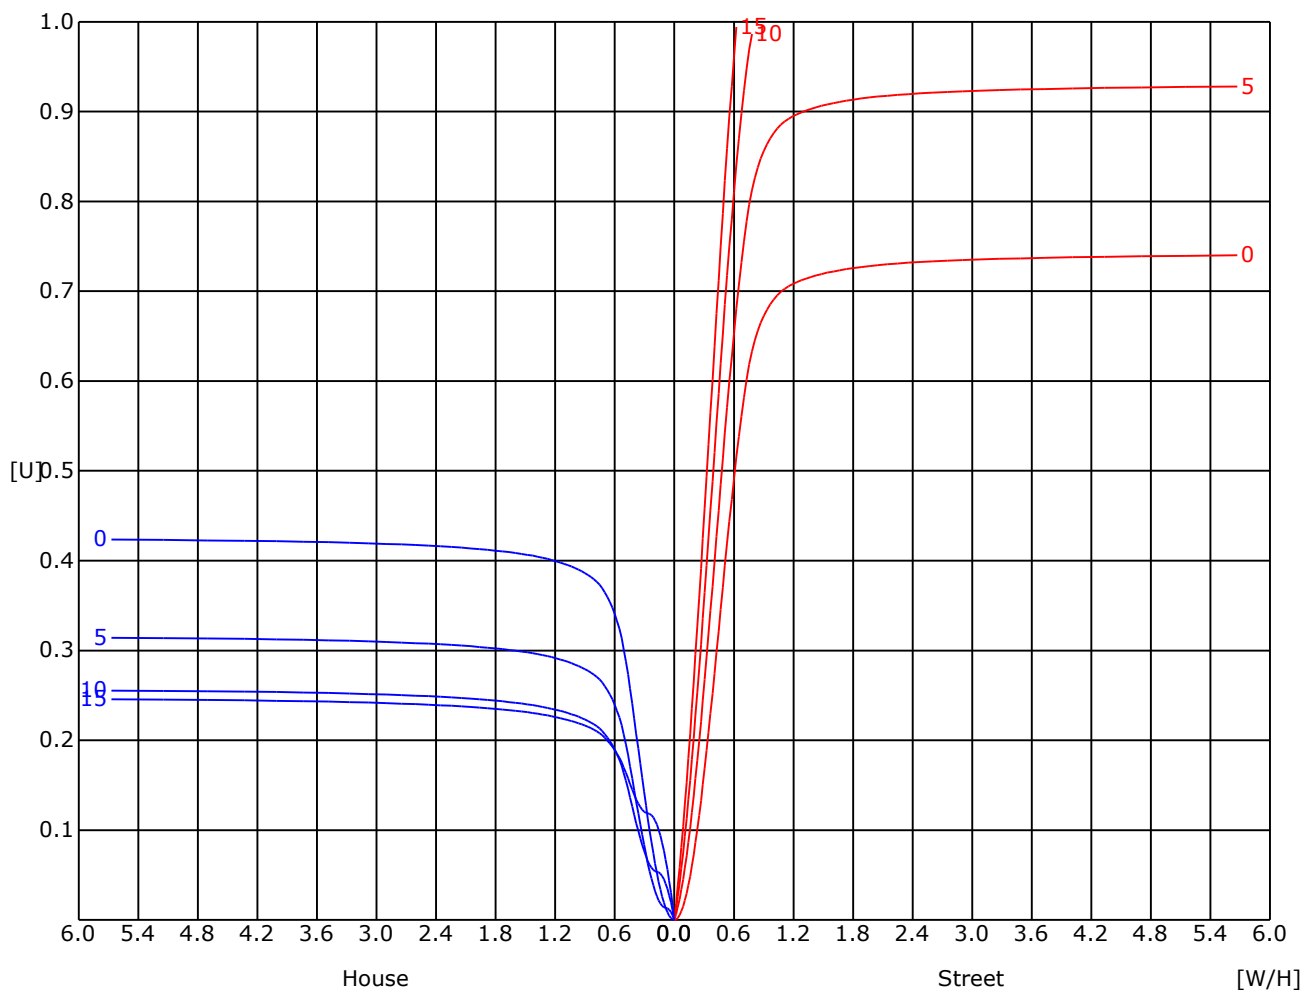


C Range: 0 - 360 Deg  
C Interval: 45.0 Deg  
Test Speed: High  
Temperature: 25  
Operators: QC01  
Test Date: 2024/4/24 11:47:52

G Range: 0 - 90 Deg  
G Interval: 1.0 Deg  
Test System: Huipu CPM-1600B Goniophotometer  
Humidity: 60  
Test Distance: 6.81 m  
Remarks:

Report No.:

Test Time: 2024/4/24 11:47:52

LX-DISTANCE DIAGRAM

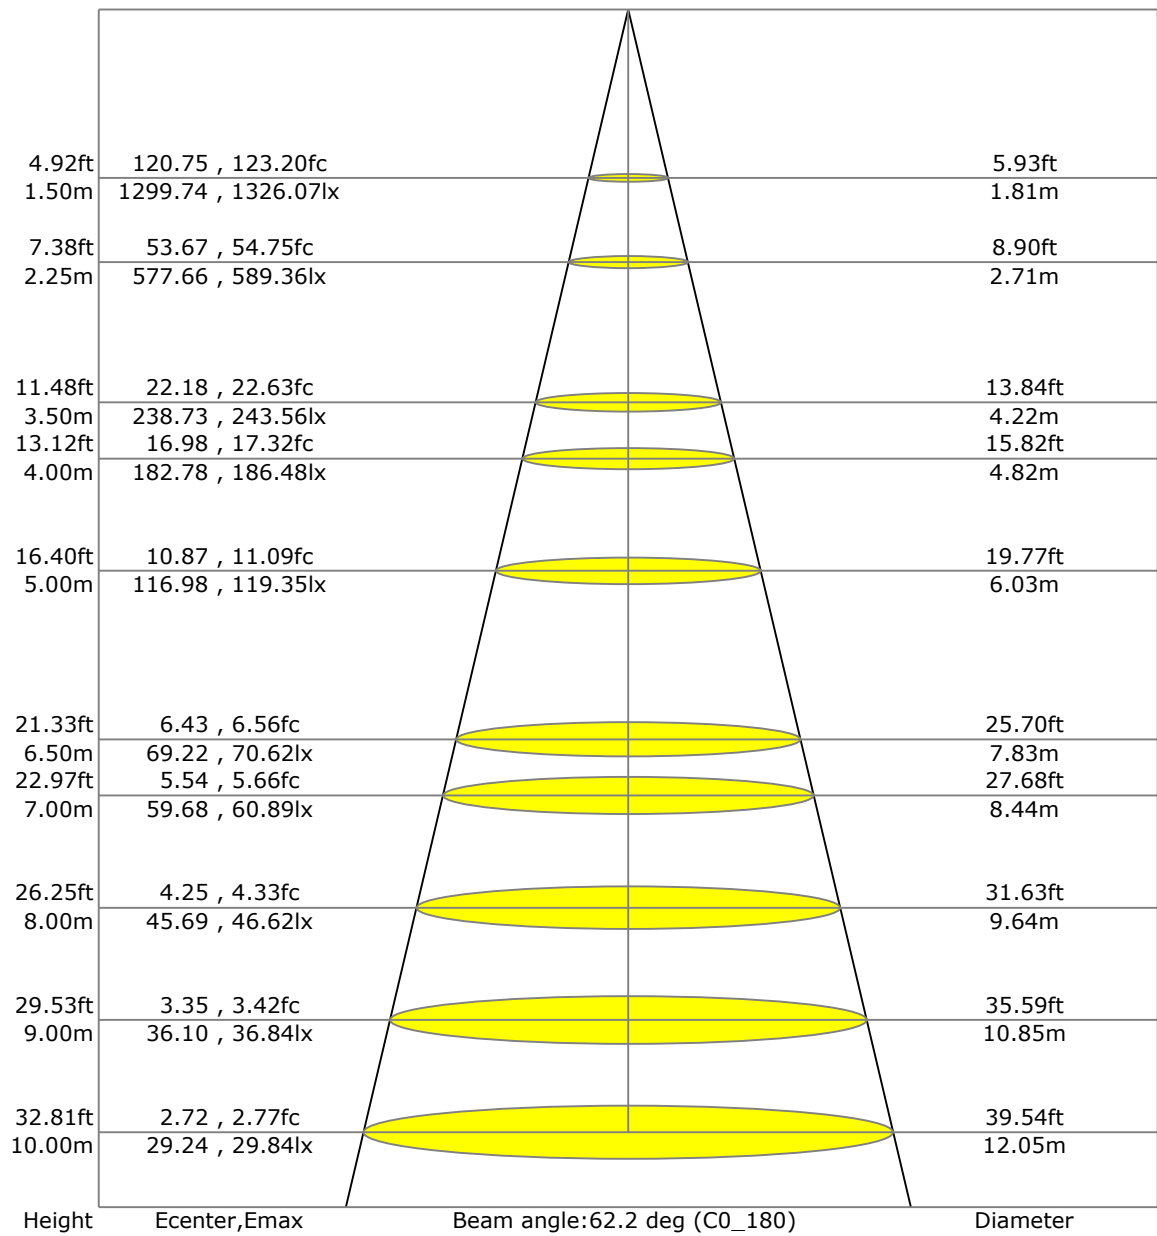

C Range: 0 - 360 Deg  
C Interval: 45.0 Deg  
Test Speed: High  
Temperature: 25  
Operators: QC01  
Test Date: 2024/4/24 11:47:52

G Range: 0 - 90 Deg  
G Interval: 1.0 Deg  
Test System: Huipu CPM-1600B Goniophotometer  
Humidity: 60  
Test Distance: 6.81 m  
Remarks:

Report No.:

Test Time: 2024/4/24 11:47:52

UGR(Unified Glare Rating) TABLE

|                  |     |                |       |       |       |       |                  |       |       |       |       |
|------------------|-----|----------------|-------|-------|-------|-------|------------------|-------|-------|-------|-------|
| RHOCC            |     | 70             | 70    | 50    | 50    | 30    | 70               | 70    | 50    | 50    | 30    |
| RHOW             |     | 50             | 30    | 50    | 30    | 30    | 50               | 30    | 50    | 30    | 30    |
| RHOF             |     | 20             | 20    | 20    | 20    | 20    | 20               | 20    | 20    | 20    | 20    |
| Room Size<br>X Y |     | Viewed Endwise |       |       |       |       | Viewed Crosswise |       |       |       |       |
| 2H               | 2H  | 16.73          | 16.78 | 16.93 | 16.97 | 17.21 | 16.94            | 16.99 | 17.14 | 17.18 | 17.42 |
|                  | 3H  | 16.70          | 16.75 | 16.91 | 16.95 | 17.19 | 16.91            | 16.96 | 17.12 | 17.15 | 17.40 |
|                  | 4H  | 16.69          | 16.74 | 16.90 | 16.94 | 17.18 | 16.89            | 16.95 | 17.10 | 17.14 | 17.39 |
|                  | 6H  | 16.67          | 16.72 | 16.88 | 16.92 | 17.17 | 16.87            | 16.93 | 17.09 | 17.13 | 17.38 |
|                  | 8H  | 16.66          | 16.71 | 16.88 | 16.91 | 17.17 | 16.87            | 16.92 | 17.08 | 17.12 | 17.37 |
|                  | 12H | 16.65          | 16.70 | 16.87 | 16.91 | 17.16 | 16.85            | 16.91 | 17.08 | 17.11 | 17.37 |
| 4H               | 2H  | 16.73          | 16.78 | 16.94 | 16.98 | 17.23 | 16.99            | 17.04 | 17.20 | 17.24 | 17.49 |
|                  | 3H  | 16.71          | 16.76 | 16.93 | 16.97 | 17.22 | 16.96            | 17.02 | 17.19 | 17.22 | 17.48 |
|                  | 4H  | 16.69          | 16.74 | 16.92 | 16.95 | 17.21 | 16.95            | 17.00 | 17.18 | 17.21 | 17.47 |
|                  | 6H  | 16.67          | 16.72 | 16.91 | 16.94 | 17.20 | 16.92            | 16.97 | 17.16 | 17.19 | 17.46 |
|                  | 8H  | 16.66          | 16.71 | 16.90 | 16.93 | 17.20 | 16.91            | 16.96 | 17.15 | 17.18 | 17.45 |
|                  | 12H | 16.65          | 16.69 | 16.89 | 16.92 | 17.19 | 16.90            | 16.94 | 17.15 | 17.17 | 17.44 |
| 8H               | 4H  | 16.73          | 16.78 | 16.94 | 16.98 | 17.23 | 17.02            | 17.07 | 17.24 | 17.27 | 17.53 |
|                  | 6H  | 16.68          | 16.72 | 16.93 | 16.96 | 17.23 | 16.98            | 17.03 | 17.24 | 17.27 | 17.54 |
|                  | 8H  | 16.67          | 16.71 | 16.93 | 16.95 | 17.23 | 16.97            | 17.01 | 17.23 | 17.26 | 17.53 |
|                  | 12H | 16.65          | 16.69 | 16.92 | 16.95 | 17.23 | 16.96            | 16.99 | 17.22 | 17.25 | 17.53 |
| 12H              | 4H  | 16.69          | 16.73 | 16.93 | 16.96 | 17.23 | 17.04            | 17.09 | 17.29 | 17.32 | 17.59 |
|                  | 6H  | 16.67          | 16.71 | 16.93 | 16.96 | 17.23 | 17.04            | 17.08 | 17.30 | 17.32 | 17.60 |

C Range: 0 - 360 Deg  
C Interval: 45.0 Deg  
Test Speed: High  
Temperature: 25  
Operators: QC01  
Test Date: 2024/4/24 11:47:52

G Range: 0 - 90 Deg  
G Interval: 1.0 Deg  
Test System: Huipu CPM-1600B Goniophotometer  
Humidity: 60  
Test Distance: 6.81 m  
Remarks:




G Range: 0 - 90 Deg  
G Interval: 1.0 Deg  
Test System: Huipu CPM-1600B Goniophotometer  
Humidity: 60  
Test Distance: 6.81 m  
Remarks:

Report No.:

Test Time: 2024/4/24 11:47:52

## SPACE ISOLX DIAGRAM

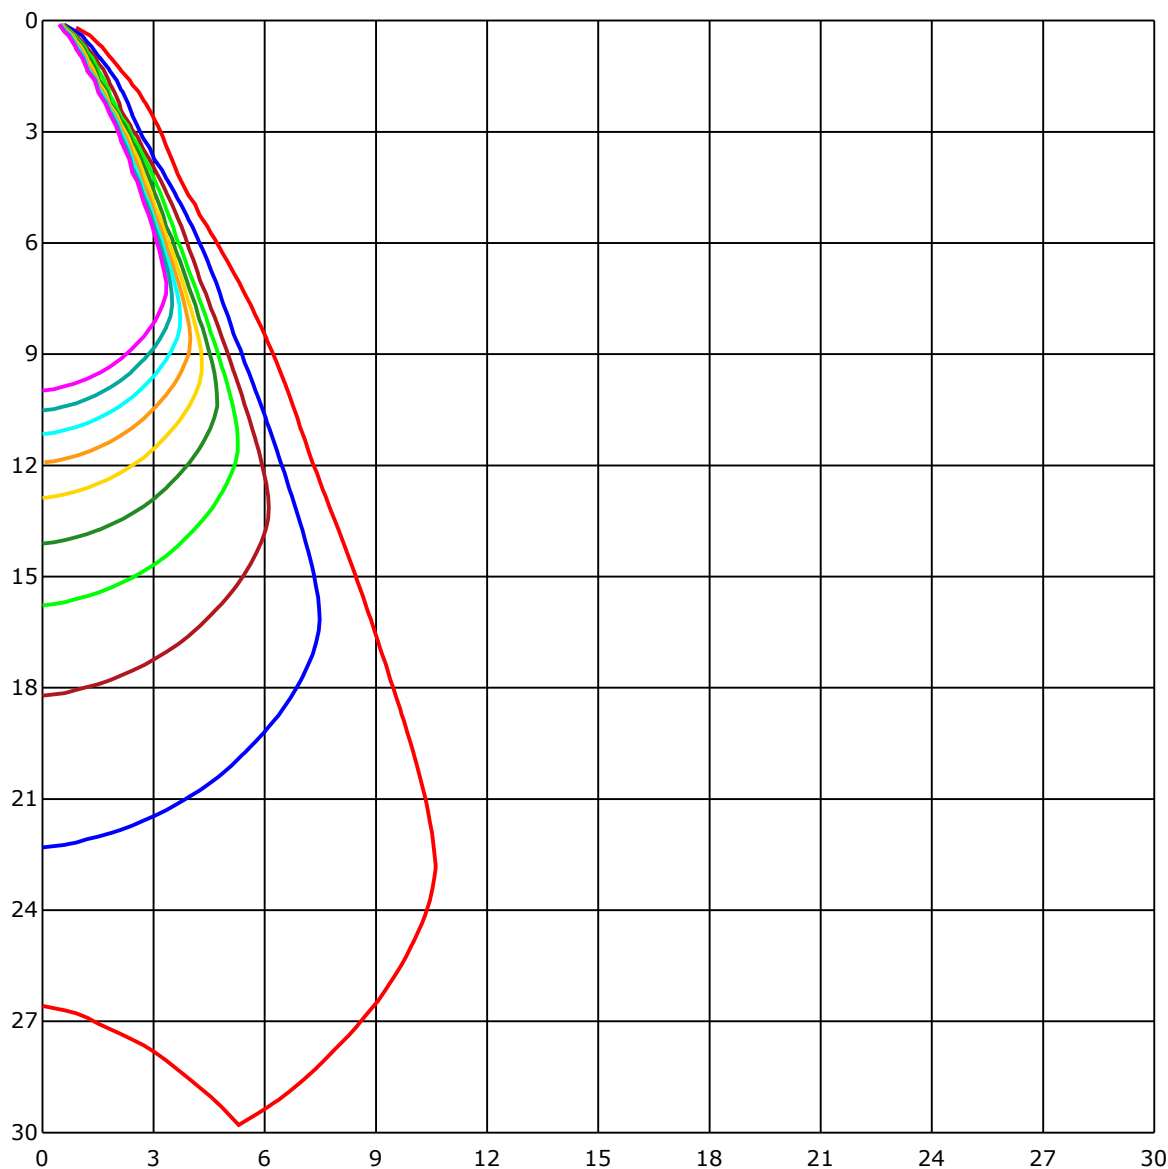

Unit of illumination:lx

29.381  
26.443  
23.505  
20.567  
17.629

14.691  
11.752  
8.814  
5.876  
2.938

C Range: 0 - 360 Deg  
C Interval: 45.0 Deg  
Test Speed: High  
Temperature: 25  
Operators: QC01  
Test Date: 2024/4/24 11:47:52

G Range: 0 - 90 Deg  
G Interval: 1.0 Deg  
Test System: Huipu CPM-1600B Goniophotometer  
Humidity: 60  
Test Distance: 6.81 m  
Remarks:

Report No.:

Test Time: 2024/4/24 11:47:52

LUMINOUS DISTRIBUTION INTENSITY DATA

| Gamma\C | C0      | C45     | C90     | C135    | C180    | C225    | C270    | C315    | C360    |  |
|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|--|
| G0      | 2924.4  | 2915.7  | 2894.24 | 2912.37 | 2924.4  | 2915.7  | 2894.24 | 2912.37 | 2924.4  |  |
| G1      | 2913.77 | 2919.11 | 2901.82 | 2930.78 | 2937.51 | 2910.71 | 2884.41 | 2909.9  | 2913.77 |  |
| G2      | 2904.38 | 2927.37 | 2909.9  | 2937.02 | 2942.85 | 2905.01 | 2881.22 | 2896.26 | 2904.38 |  |
| G3      | 2880.73 | 2933.65 | 2920.5  | 2957.22 | 2951.52 | 2896.3  | 2862.55 | 2883.51 | 2880.73 |  |
| G4      | 2865.46 | 2953.76 | 2950.53 | 2960.99 | 2950.13 | 2894.28 | 2850.02 | 2877.09 | 2865.46 |  |
| G5      | 2851.05 | 2948.96 | 2960.14 | 2972.21 | 2952.6  | 2888.81 | 2828.61 | 2859.85 | 2851.05 |  |
| G6      | 2832.25 | 2943.21 | 2970.82 | 2963.68 | 2944.96 | 2880.68 | 2808.99 | 2837.63 | 2832.25 |  |
| G7      | 2807.65 | 2933.38 | 2976.16 | 2959.51 | 2943.44 | 2871.88 | 2774.79 | 2825.74 | 2807.65 |  |
| G8      | 2785.11 | 2930.78 | 2980.52 | 2953.72 | 2939.35 | 2851.59 | 2743.63 | 2800.01 | 2785.11 |  |
| G9      | 2763.74 | 2917.67 | 2983.66 | 2934.77 | 2939.71 | 2828.61 | 2703.5  | 2779.41 | 2763.74 |  |
| G10     | 2735.24 | 2902.81 | 2972.48 | 2917.22 | 2939.67 | 2800.46 | 2657.58 | 2747.36 | 2735.24 |  |
| G11     | 2708.53 | 2881.18 | 2953.76 | 2905.42 | 2938.77 | 2767.42 | 2606.99 | 2716.16 | 2708.53 |  |
| G12     | 2681.77 | 2859.85 | 2938.37 | 2898.95 | 2928.09 | 2729.85 | 2557.43 | 2673.29 | 2681.77 |  |
| G13     | 2650.58 | 2829.37 | 2918.93 | 2890.69 | 2926.11 | 2677.91 | 2507.06 | 2633.2  | 2650.58 |  |
| G14     | 2616.37 | 2808.77 | 2903.93 | 2880.01 | 2920.59 | 2633.7  | 2444.08 | 2584.77 | 2616.37 |  |
| G15     | 2577.76 | 2790.63 | 2886.47 | 2874.13 | 2914.53 | 2577.85 | 2385.19 | 2544.77 | 2577.76 |  |
| G16     | 2538.04 | 2774.02 | 2857.79 | 2864.39 | 2904.2  | 2516.98 | 2320.18 | 2487.45 | 2538.04 |  |
| G17     | 2503.11 | 2752.34 | 2834.22 | 2848.45 | 2889.21 | 2459.61 | 2241.27 | 2434.16 | 2503.11 |  |
| G18     | 2461.18 | 2740.04 | 2820.98 | 2835.43 | 2857.7  | 2398.16 | 2167.02 | 2373.11 | 2461.18 |  |
| G19     | 2423.03 | 2711.58 | 2805.4  | 2824.79 | 2835.97 | 2321.53 | 2072.53 | 2314.71 | 2423.03 |  |
| G20     | 2374.77 | 2687.39 | 2793.46 | 2798.44 | 2788.39 | 2246.57 | 1977.72 | 2250.38 | 2374.77 |  |
| G21     | 2327.41 | 2661.21 | 2768.19 | 2784.62 | 2751.08 | 2157.95 | 1854.99 | 2181.97 | 2327.41 |  |
| G22     | 2270.09 | 2643.48 | 2753.37 | 2752.25 | 2695.64 | 2067.05 | 1714.08 | 2098.07 | 2270.09 |  |
| G23     | 2213.12 | 2610.76 | 2724.37 | 2722.89 | 2649.5  | 1949.08 | 1541.66 | 2016.86 | 2213.12 |  |
| G24     | 2144.67 | 2586.56 | 2705.79 | 2680.7  | 2598.86 | 1814.18 | 1349.98 | 1913.48 | 2144.67 |  |
| G25     | 2047.34 | 2542.61 | 2679.62 | 2649.5  | 2549.3  | 1644.9  | 1119.6  | 1721.04 | 2047.34 |  |
| G26     | 1848.93 | 2504.37 | 2660.86 | 2598.01 | 2481.79 | 1458.34 | 874.41  | 1480.52 | 1848.93 |  |
| G27     | 1581.43 | 2460.65 | 2627.68 | 2549.39 | 2417.55 | 1273.93 | 645.97  | 1221.59 | 1581.43 |  |
| G28     | 1296.29 | 2417.82 | 2600.12 | 2502.08 | 2341.37 | 1073.28 | 472.51  | 977.52  | 1296.29 |  |
| G29     | 1079.69 | 2366.74 | 2559.9  | 2445.88 | 2263.62 | 842.68  | 381.61  | 754.92  | 1079.69 |  |
| G30     | 888.55  | 2311.34 | 2515.95 | 2390.17 | 2176.45 | 616.7   | 326.22  | 591.16  | 888.55  |  |
| G31     | 715.86  | 2257.25 | 2471.78 | 2329.43 | 2087.83 | 463.0   | 279.22  | 496.71  | 715.86  |  |
| G32     | 613.15  | 2187.89 | 2426.08 | 2252.58 | 1971.75 | 382.46  | 241.6   | 424.12  | 613.15  |  |
| G33     | 542.81  | 2088.51 | 2369.34 | 2169.44 | 1822.58 | 325.0   | 211.3   | 362.67  | 542.81  |  |
| G34     | 472.2   | 1899.03 | 2320.77 | 2049.72 | 1635.43 | 280.7   | 186.7   | 310.15  | 472.2   |  |
| G35     | 405.94  | 1651.1  | 2261.6  | 1862.26 | 1431.99 | 244.65  | 165.82  | 264.72  | 405.94  |  |
| G36     | 340.76  | 1395.94 | 2163.34 | 1616.98 | 1164.85 | 216.77  | 150.61  | 226.25  | 340.76  |  |

C Range: 0 - 360 Deg  
C Interval: 45.0 Deg  
Test Speed: High  
Temperature: 25  
Operators: QC01  
Test Date: 2024/4/24 11:47:52

G Range: 0 - 90 Deg  
G Interval: 1.0 Deg  
Test System: Huipu CPM-1600B Goniophotometer  
Humidity: 60  
Test Distance: 6.81 m  
Remarks:

Report No.:

Test Time: 2024/4/24 11:47:52

LUMINOUS DISTRIBUTION INTENSITY DATA(Continue 1)

| Gamma\C | C0     | C45     | C90     | C135    | C180   | C225   | C270   | C315   | C360   |  |
|---------|--------|---------|---------|---------|--------|--------|--------|--------|--------|--|
| G37     | 278.86 | 1160.86 | 1976.01 | 1352.22 | 889.05 | 194.37 | 141.85 | 191.64 | 278.86 |  |
| G38     | 222.3  | 963.52  | 1732.22 | 1088.31 | 655.8  | 176.19 | 134.85 | 165.06 | 222.3  |  |
| G39     | 168.83 | 799.98  | 1464.85 | 839.71  | 511.84 | 163.44 | 128.12 | 150.56 | 168.83 |  |
| G40     | 135.88 | 701.23  | 1210.41 | 654.0   | 431.8  | 154.69 | 122.19 | 140.28 | 135.88 |  |
| G41     | 121.34 | 625.27  | 984.71  | 552.15  | 371.82 | 146.79 | 116.4  | 132.34 | 121.34 |  |
| G42     | 112.23 | 553.67  | 819.65  | 479.87  | 319.8  | 140.19 | 110.79 | 124.66 | 112.23 |  |
| G43     | 104.46 | 479.29  | 717.57  | 411.96  | 275.09 | 133.55 | 105.18 | 118.06 | 104.46 |  |
| G44     | 97.14  | 405.99  | 635.01  | 351.94  | 237.69 | 127.22 | 99.66  | 111.96 | 97.14  |  |
| G45     | 91.17  | 333.53  | 553.58  | 295.11  | 206.45 | 121.2  | 94.54  | 105.72 | 91.17  |  |
| G46     | 85.07  | 262.52  | 475.97  | 243.21  | 178.53 | 115.64 | 89.78  | 99.79  | 85.07  |  |
| G47     | 79.99  | 195.86  | 400.82  | 197.34  | 161.07 | 109.62 | 84.98  | 94.4   | 79.99  |  |
| G48     | 74.74  | 149.3   | 327.47  | 157.43  | 149.39 | 104.37 | 80.94  | 89.47  | 74.74  |  |
| G49     | 69.67  | 121.34  | 255.96  | 133.32  | 140.73 | 99.21  | 76.72  | 84.48  | 69.67  |  |
| G50     | 64.73  | 106.48  | 198.05  | 120.48  | 132.87 | 94.45  | 72.99  | 79.77  | 64.73  |  |
| G51     | 60.74  | 96.87   | 157.25  | 112.18  | 125.92 | 89.69  | 69.22  | 75.33  | 60.74  |  |
| G52     | 55.93  | 89.69   | 133.55  | 104.5   | 119.36 | 85.52  | 65.31  | 71.15  | 55.93  |  |
| G53     | 52.03  | 82.96   | 119.32  | 98.22   | 113.26 | 81.57  | 60.92  | 67.16  | 52.03  |  |
| G54     | 48.08  | 77.17   | 109.8   | 92.2    | 107.38 | 77.57  | 56.92  | 62.67  | 48.08  |  |
| G55     | 43.45  | 71.69   | 101.41  | 86.59   | 101.72 | 72.99  | 53.87  | 58.04  | 43.45  |  |
| G56     | 39.1   | 66.26   | 94.36   | 81.79   | 96.2   | 68.41  | 52.03  | 53.82  | 39.1   |  |
| G57     | 35.51  | 61.01   | 87.63   | 76.72   | 91.17  | 64.46  | 49.92  | 51.08  | 35.51  |  |
| G58     | 33.26  | 56.34   | 81.97   | 71.51   | 86.14  | 61.86  | 47.94  | 48.62  | 33.26  |  |
| G59     | 31.02  | 52.25   | 76.0    | 67.25   | 81.7   | 59.66  | 46.1   | 46.06  | 31.02  |  |
| G60     | 28.95  | 47.9    | 70.7    | 63.03   | 77.35  | 57.46  | 44.89  | 44.08  | 28.95  |  |
| G61     | 27.47  | 43.27   | 65.63   | 59.03   | 73.53  | 55.62  | 43.72  | 42.6   | 27.47  |  |
| G62     | 26.26  | 39.55   | 61.01   | 54.77   | 69.8   | 54.41  | 42.6   | 41.03  | 26.26  |  |
| G63     | 25.0   | 35.46   | 56.43   | 51.08   | 65.54  | 52.66  | 41.16  | 39.68  | 25.0   |  |
| G64     | 23.75  | 31.06   | 52.21   | 46.73   | 60.87  | 51.35  | 40.27  | 38.2   | 23.75  |  |
| G65     | 22.67  | 28.06   | 47.72   | 42.78   | 57.32  | 50.14  | 39.19  | 36.9   | 22.67  |  |
| G66     | 21.55  | 26.17   | 43.05   | 38.83   | 54.63  | 49.11  | 38.56  | 35.78  | 21.55  |  |
| G67     | 20.83  | 23.88   | 38.56   | 36.81   | 52.61  | 47.58  | 37.44  | 34.74  | 20.83  |  |
| G68     | 20.34  | 22.18   | 35.82   | 34.92   | 50.64  | 46.28  | 36.54  | 33.71  | 20.34  |  |
| G69     | 19.57  | 20.83   | 33.35   | 33.08   | 48.8   | 45.11  | 35.15  | 32.77  | 19.57  |  |
| G70     | 18.9   | 19.57   | 31.2    | 31.47   | 47.4   | 43.81  | 34.03  | 31.87  | 18.9   |  |
| G71     | 18.27  | 18.32   | 29.36   | 30.17   | 45.47  | 42.65  | 32.37  | 30.7   | 18.27  |  |
| G72     | 17.46  | 17.46   | 27.83   | 28.77   | 43.72  | 41.03  | 30.84  | 29.54  | 17.46  |  |
| G73     | 16.52  | 16.34   | 26.22   | 27.7    | 42.47  | 39.41  | 29.18  | 28.37  | 16.52  |  |

C Range: 0 - 360 Deg  
C Interval: 45.0 Deg  
Test Speed: High  
Temperature: 25  
Operators: QC01  
Test Date: 2024/4/24 11:47:52

G Range: 0 - 90 Deg  
G Interval: 1.0 Deg  
Test System: Huipu CPM-1600B Goniophotometer  
Humidity: 60  
Test Distance: 6.81 m  
Remarks:

## LUMINOUS DISTRIBUTION INTENSITY DATA(Continue 2)

[illegible]

C Range: 0 - 360 Deg  
C Interval: 45.0 Deg  
Test Speed: High  
Temperature: 25  
Operators: QC01  
Test Date: 2024/4/24 11:47:52

G Range: 0 - 90 Deg  
G Interval: 1.0 Deg  
Test System: Huipu CPM-1600B Goniophotometer  
Humidity: 60  
Test Distance: 6.81 m  
Remarks: