

Product Description

Use high-performance COB LED, Ra>80. Aluminum heatsink and unique die casting heatsink design ensure better heat dissipation.

Luminaire

|               |                                                |
|---------------|------------------------------------------------|
| Structure     | Adjustable Down Light LED                      |
| Model No.     | IBSP104S-2F                                    |
| Wattage       | 2×10W   2×15W   2×28W                          |
| Luminous Flux | 2000lm   3000lm   5600lm                       |
| Beam          | 15°   24°   38°   45°   60°                    |
| IP Ratings    | IP65                                           |
| Material      | Die-casting alu. trim and heatsink, PMMA. lens |
| Finish        | Matt white or black trim                       |

Installation

Suitable for 5~18 mm thick ceiling board

LEDs


|            |                                                        |
|------------|--------------------------------------------------------|
| Brand      | Bridgelux   Cree                                       |
| Type       | COB                                                    |
| Color Temp | 2700K   3000K   3500K   4000K<br>5000K   5700K   6500K |
| CRI        | 80   90                                                |

Control Gear



Remote constant current LED driver

|               |                           |
|---------------|---------------------------|
| Brand         | Lifud   Eaglerise   BOKE  |
| Input Voltage | 220~240Vac   100-240Vac   |
| Dimming       | Non Dim   Dim             |
| Remarks       | Flicker-free,PF 0.5   0.9 |

Photometrics




Ra>80

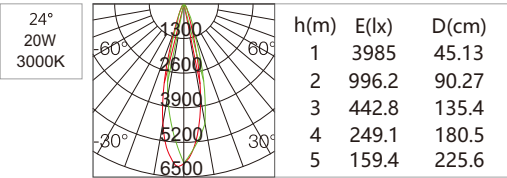


Job/Project \_\_\_\_\_  
Location \_\_\_\_\_  
Fixture Ref. \_\_\_\_\_  
Quantity \_\_\_\_\_  
Remarks \_\_\_\_\_

Picture



Line art

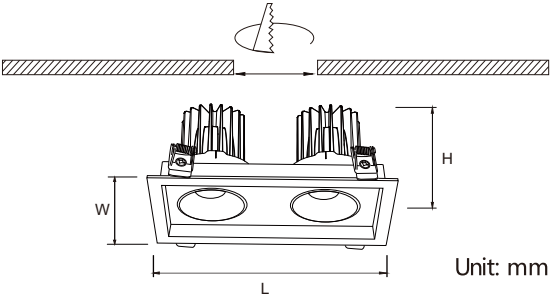

| Model                | Watts | W×L×H(mm)        | Cutout(mm) |
|----------------------|-------|------------------|------------|
| IBSP104SCT095H78-2F  | 2×10W | W106×L201×H78mm  | L95×W190mm |
| IBSP104SCT095H98-2F  | 2×15W | W106×L201×H98mm  | L95×W190mm |
| IBSP104SCT095H124-2F | 2×28W | W106×L201×H124mm | L95×W190mm |