

Product Description

Use high-performance COB LED, Ra>80. Aluminum heatsink and unique die casting heatsink design ensure better heat dissipation.

Job/Project

Location

Fixture Ref.

Quantity

Remarks

Luminaire

Structure	Adjustable Down Light LED
Model No.	IBSP104S-3F
Wattage	3×10W 3×15W 3×25W
Luminous Flux	2700lm 4050lm 6750lm
Beam	15° 24° 38° 45° 60°
IP Ratings	IP65
Material	Die-casting alu. trim and heatsink, PMMA. lens
Finish	Matt white or black trim

Picture



Installation

Suitable for 5~18 mm thick ceiling board

LEDs

Brand	Bridgelux Cree
Type	COB
Color Temp	2700K 3000K 3500K 4000K 5000K 5700K 6500K
CRI	80 90




Control Gear

Remote constant current LED driver


Brand	Lifud Eaglerise BOKE
Input Voltage	220~240Vac 100-240Vac
Dimming	Non Dim Dim
Remarks	Flicker-free,PF 0.5 0.9




Photometrics



Ra>80



Line art

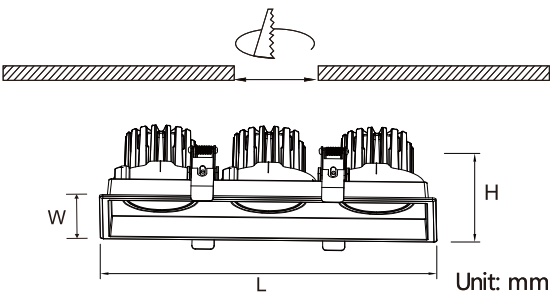

Model	Watts	W×L×H(mm)	Cutout(mm)
IBSP104SCT095H78-3F	3×10W	W106×L296×H78mm	W95×L285mm
IBSP104SCT095H98-3F	3×15W	W106×L296×H98mm	W95×L285mm
IBSP104SCT095H124-3F	3×25W	W106×L296×H124mm	W95×L285mm