

Job/Project

Location

Fixture Ref.

Quantity

Remarks

Product Description

Use high-performance COB LED, Ra>80. Aluminum heatsink and unique die casting heatsink design ensure better heat dissipation.

Luminaire

Structure	Adjustable Down Light LED
Model No.	IBSP104S
Wattage	8W 10W 15W 25W 28W
Luminous Flux	>720lm 900lm 1350lm 2250lm 2520lm
Beam	15° 24° 38° 45° 60°
IP Ratings	IP20 IP65
Material	Die-casting alu. trim and heatsink, PMMA. lens
Finish	Matt white or black trim

Installation

Suitable for 5~18 mm thick ceiling board


LEDs

Brand	Bridgelux Cree
Type	COB
Color Temp	2700K 3000K 4000K 5000K 5700K 6500K
CRI	80 90



Control Gear

Remote constant current LED driver	
Brand	Lifud Eaglerise
Input Voltage	220~240Vac 100-240Vac
Dimming	Non Dim Dim
Remarks	Flicker-free,PF 0.5 0.9

Photometrics




Ra>80

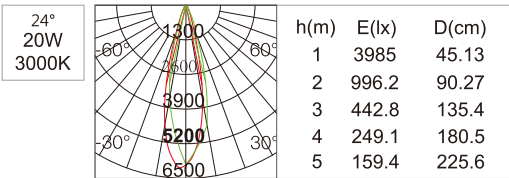

Picture



Line art

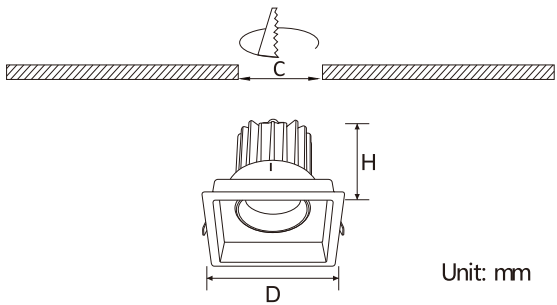

Unit: mm

Model	Watts	L×W×H (mm)	Cutout(mm)
IBSP104SCT080	8W	L88×W88×H85mm	L80×W80mm
IBSP104SCT080H86	15W	L88×W88×H86mm	L80×W80mm
IBSP104SCT095H78	10W	L106×W106×H78mm	L95×W95mm
IBSP104SCT095H98	15W	L106×W106×H98mm	L95×W95mm
IBSP104SCT095H124	25W	L106×W106×H124mm	L95×W95mm
IBSP104SCT120	28W	L129×W129×H125mm	L120×W120mm