

Product Description

Use high-performance COB LED, Ra>80. Aluminum heatsink and unique die casting heatsink design ensure better heat dissipation.

Luminaire

Structure	Adjustable Down Light LED
Model No.	IBSP151
Wattage	8W 10W 15W 25W
Luminous Flux	800lm 1000lm 1500lm 2500lm
Beam	15° 24° 38° 45° 60°
IP Ratings	IP65
Material	Die-casting alu. trim and heatsink, PMMA. lens
Finish	Matt white or black trim

Installation

Suitable for 5~18 mm thick ceiling board

LEDs


Brand	Bridgelux Cree
Type	COB
Color Temp	2700K 3000K 3500K 4000K 5000K 5700K 6500K
CRI	80 90

Control Gear



Remote constant current LED driver

Brand	Lifud Eaglerise BOKE
Input Voltage	220~240Vac 100-240Vac
Dimming	Non Dim Dim
Remarks	Flicker-free,PF 0.5 0.9

Photometrics



Ra>80

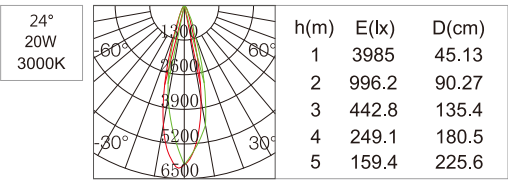


Job/Project _____
Location _____
Fixture Ref. _____
Quantity _____
Remarks _____

Picture



Line art

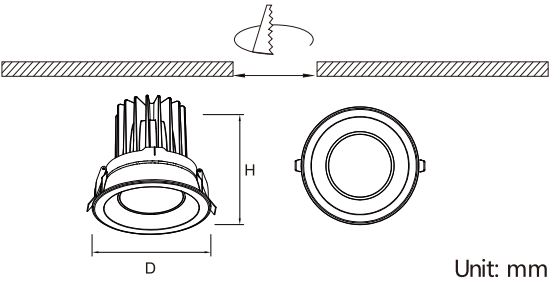

Model	Watts	D xH(mm)	Cutout(mm)
IBSP151CT075H72	8W	Ø 85×H72mm	Ø 75mm
IBSP151CT075H76	15W	Ø 85×H76mm	Ø 75mm
IBSP151CT095H67	10W	Ø 105×H67mm	Ø 95mm
IBSP151CT095H88	15W	Ø 105×H88mm	Ø 95mm
IBSP151CT095H114	25W	Ø 105×H114mm	Ø 95mm