

Job/Project

Location

Fixture Ref.

Quantity

Remarks

Product Description

Use high-performance SMD LED, Ra>80. Aluminum heatsink and unique die casting heatsink design ensure better heat dissipation.

Luminaire

Structure	Surface Mount Downlight LED
Model No.	IBDL238
Wattage	15W 30W 50W
Luminous Flux	> 100lm/w
Beam	60°
IP Ratings	IP65
Material	Die-casting alu. trim and heatsink,PMMA. lens
Finish	White black

Installation

Installation
Suitable for 5~18 mm thick ceiling board


LEDs

Brand	Bridgelux Osram
Type	SMD
Color Temp	2700K 3000K 4000K 5000K 5700K 6500K
CRI	80 90

Control Gear

Remote constant current LED driver	
Brand	InBright Lifud OEM
Input Voltage	220~240Vac 100-240Vac
Dimming	Non Dim Dim
Remarks	Flicker-free,PF 0.5 0.9

Photometrics

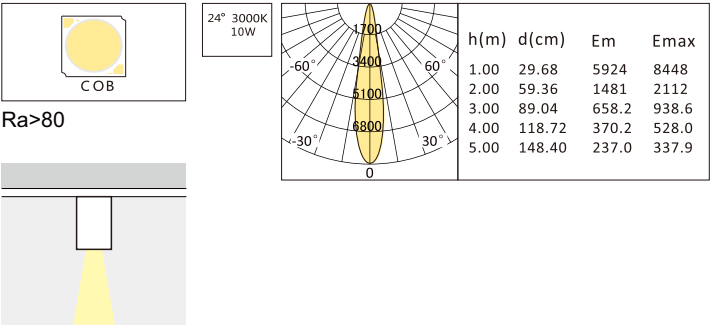

Picture



Line art

