

Report No.:

Test Time: 2024/9/6 15:52:58

## LUMINAIRE PHOTOMETRIC TEST REPORT

### Luminaire Property

Manufacturer: InBright  
Luminaire Type: IBDL226CT200-41.3W  
Lamp Type:  
Luminous Width: 190 mm  
Luminous Length: 190 mm  
Luminous Height: 70 mm


Voltage(V): 219.80 V  
Current(A): 0.1910 A  
Power(W): 41.31 W  
Power Factor: 0.9810  
Lamp Luminous Flux: 4104.80

### Photometric Results


CIE Class: Direct  
Luminaire Luminous Flux: 4104.803 lm  
Downward Ratio: 100.00%  
Luminaire Efficacy Rating(LER): 99.37 lm/W  
Beam Angle(50%) C0-180,C90-270: 95.0,95.3  
Field Angle(10%) C0-180,C90-270: 142.3,142.3  
S/MH C0-180,C90-270: 1.155,1.155

Max. Intensity: 1846.98 cd  
Max.Intensity Angle: C=0 Gamma=1  
Upward Ratio: 0.00%  
Efficacy: 100.00%  
Center Intensity: 1841.53 cd  
Effective Luminous Flux: 3969.18 lm  
ERP( $\phi$ use)(120deg): 3591.30 lm

Picture of Luminaire



Luminous Intensity Distribution Curve

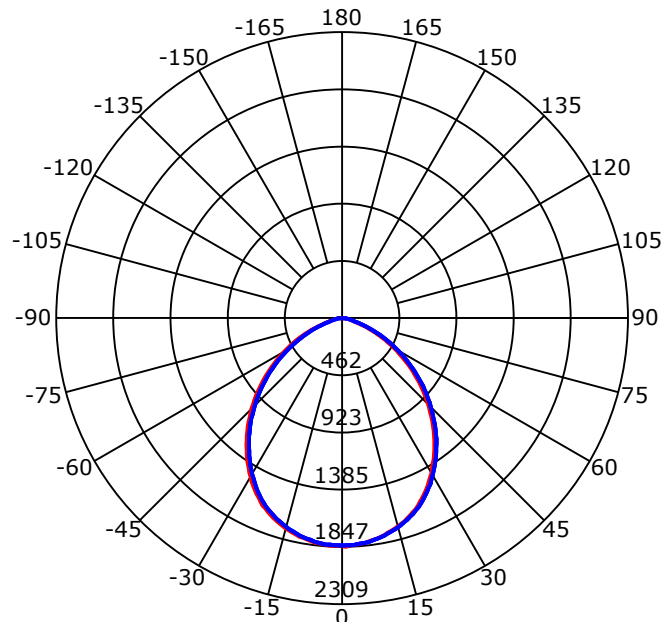

Beam Angle(50%) C0-180,C90-270: 95.0 deg,95.3 deg

C0-180 — C90-270 —



C Range: 0 - 360 Deg  
C Interval: 45.0 Deg  
Test Speed: High  
Temperature: 25  
Operators: QC01  
Test Date: 2024/9/6 15:52:58

G Range: 0 - 90 Deg  
G Interval: 1.0 Deg  
Test System: Huipu CPM-1600B Goniophotometer  
Humidity: 60  
Test Distance: 6.71 m  
Remarks:

Report No.:

Test Time: 2024/9/6 15:52:58

## Luminous Intensity Distribution Curve

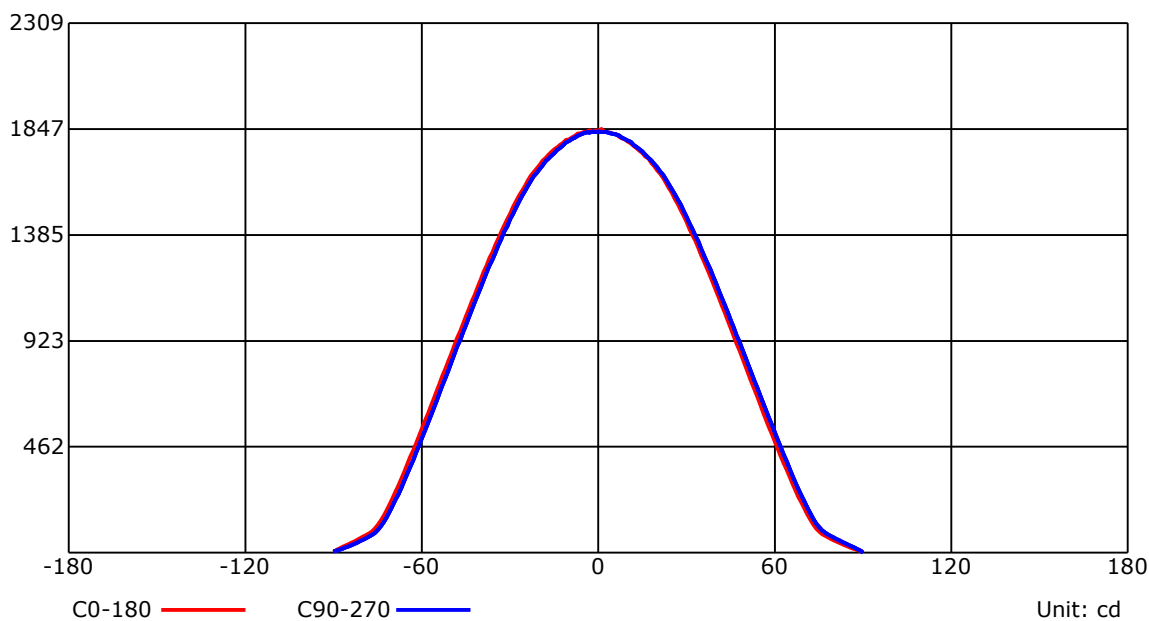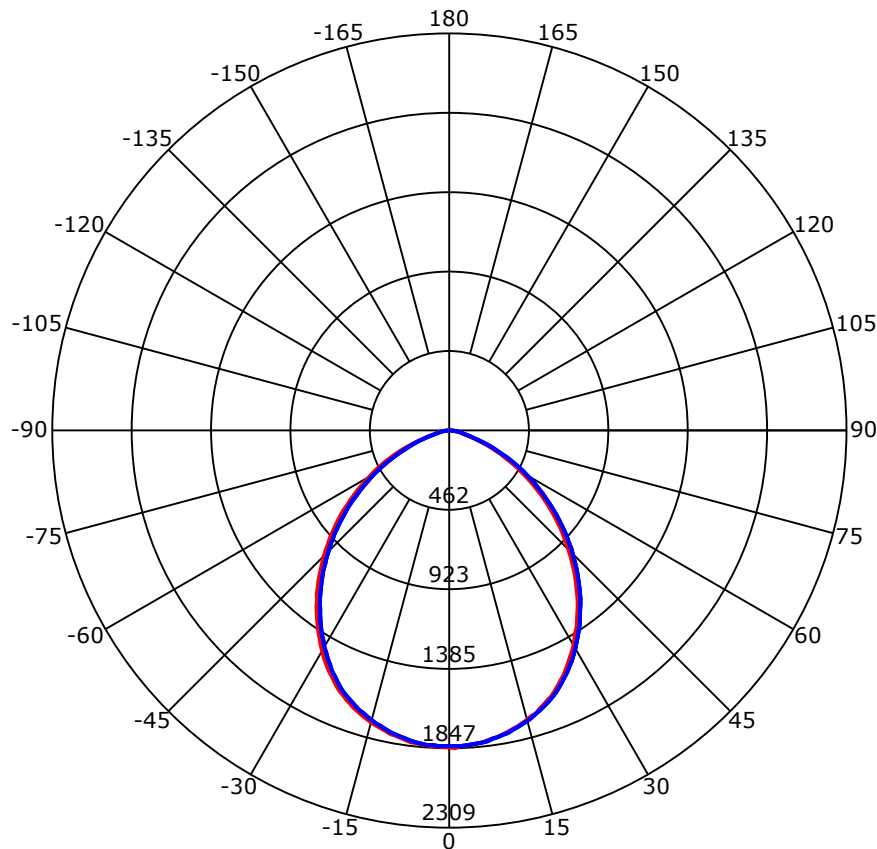


C Range: 0 - 360 Deg  
C Interval: 45.0 Deg  
Test Speed: High  
Temperature: 25  
Operators: QC01  
Test Date: 2024/9/6 15:52:58

G Range: 0 - 90 Deg  
G Interval: 1.0 Deg  
Test System: Huipu CPM-1600B Goniophotometer  
Humidity: 60  
Test Distance: 6.71 m  
Remarks:

Report No.:

Test Time: 2024/9/6 15:52:58

## Luminous Intensity Distribution Curve

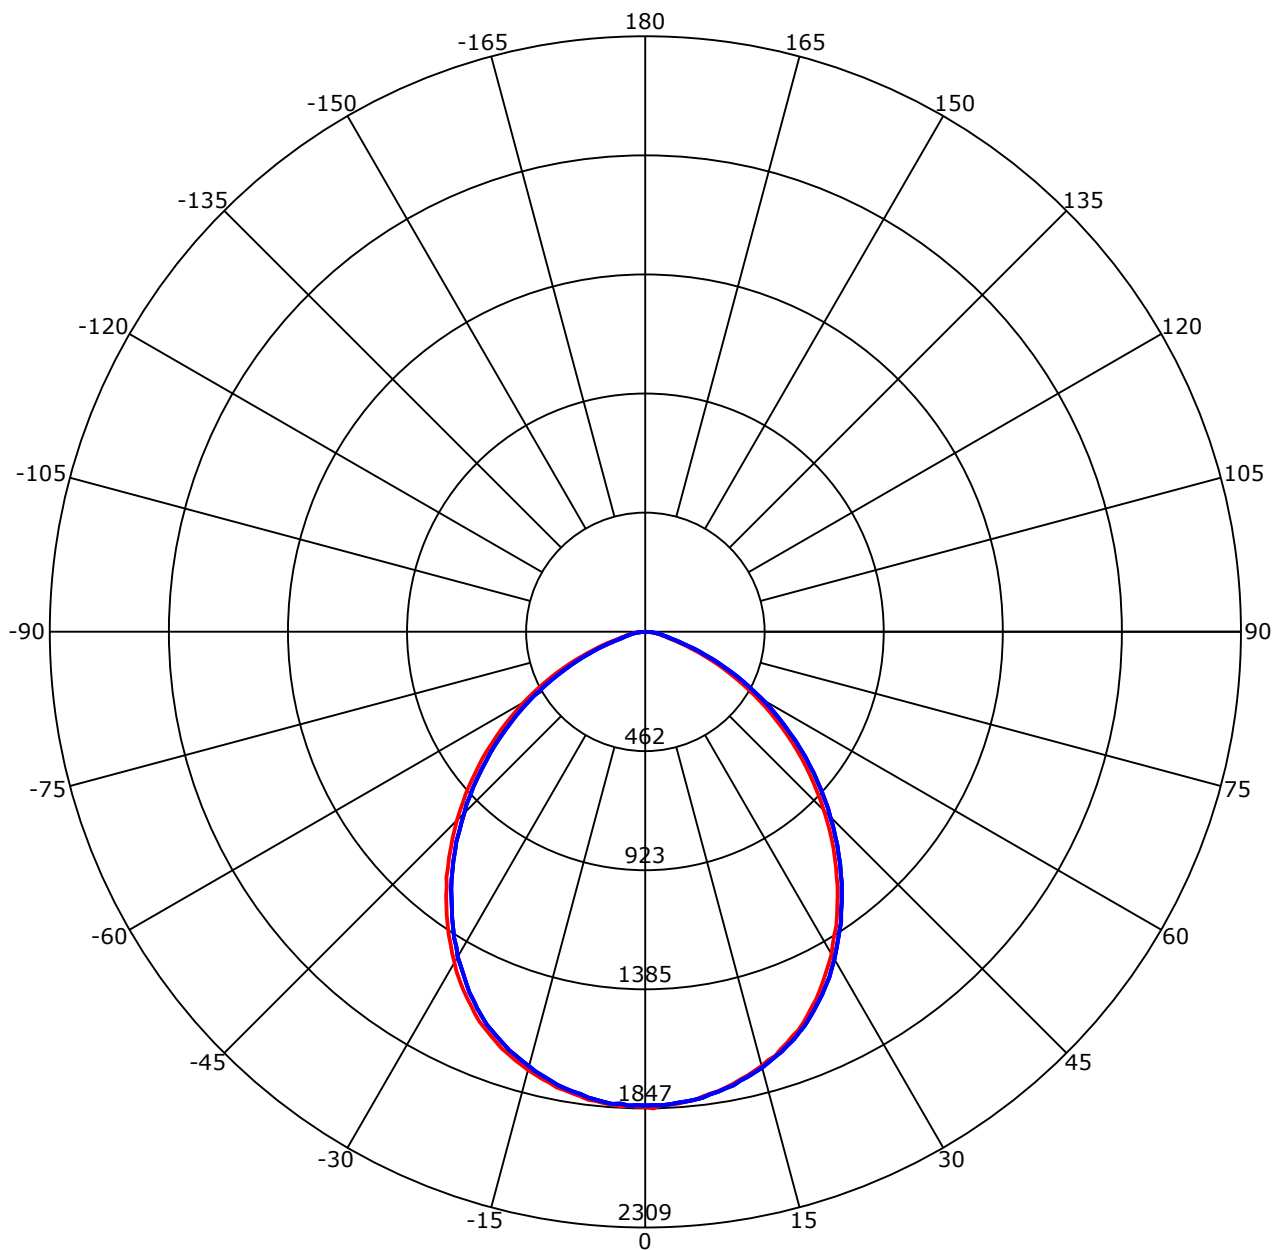

C0-180 — C90-270

Unit: cd/klm


C Range: 0 - 360 Deg  
C Interval: 45.0 Deg  
Test Speed: High  
Temperature: 25  
Operators: QC01  
Test Date: 2024/9/6 15:52:58

G Range: 0 - 90 Deg  
G Interval: 1.0 Deg  
Test System: Huipu CPM-1600B Goniophotometer  
Humidity: 60  
Test Distance: 6.71 m  
Remarks:

Report No.:

Test Time: 2024/9/6 15:52:58

## ISOCANDELA DIAGRAM (SPHERE)

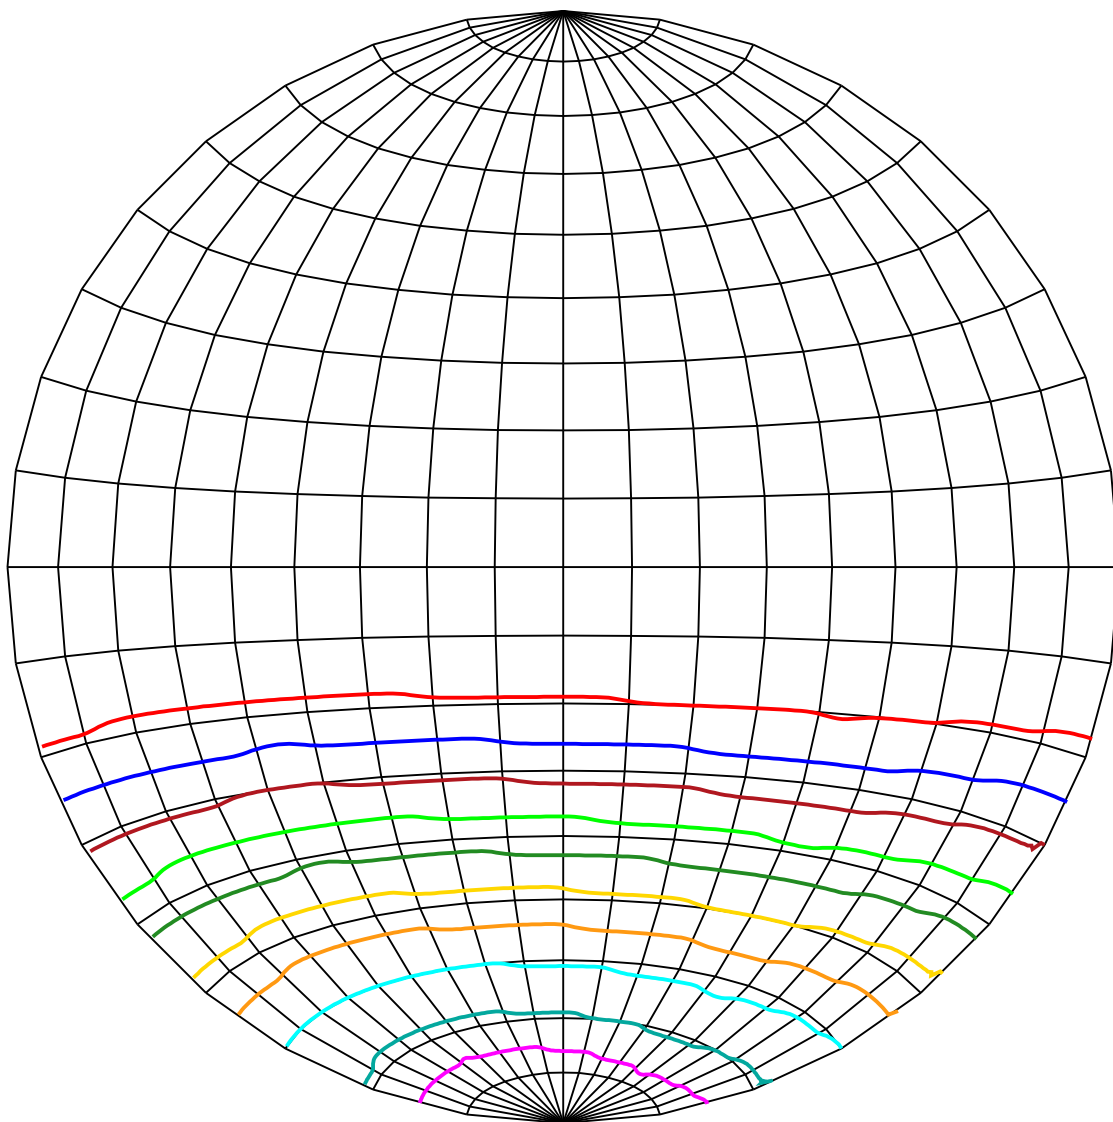

Unit of intensity:cd    Imax(100%): 1846.979 cd

|                   |                  |
|-------------------|------------------|
| 1754.63(95%Imax)  | 923.489(50%Imax) |
| 1662.281(90%Imax) | 738.791(40%Imax) |
| 1477.583(80%Imax) | 554.094(30%Imax) |
| 1292.885(70%Imax) | 369.396(20%Imax) |
| 1108.187(60%Imax) | 184.698(10%Imax) |


C Range: 0 - 360 Deg  
C Interval: 45.0 Deg  
Test Speed: High  
Temperature: 25  
Operators: QC01  
Test Date: 2024/9/6 15:52:58

G Range: 0 - 90 Deg  
G Interval: 1.0 Deg  
Test System: Huipu CPM-1600B Goniophotometer  
Humidity: 60  
Test Distance: 6.71 m  
Remarks:

Report No.:

Test Time: 2024/9/6 15:52:58

## ISOLX DIAGRAM

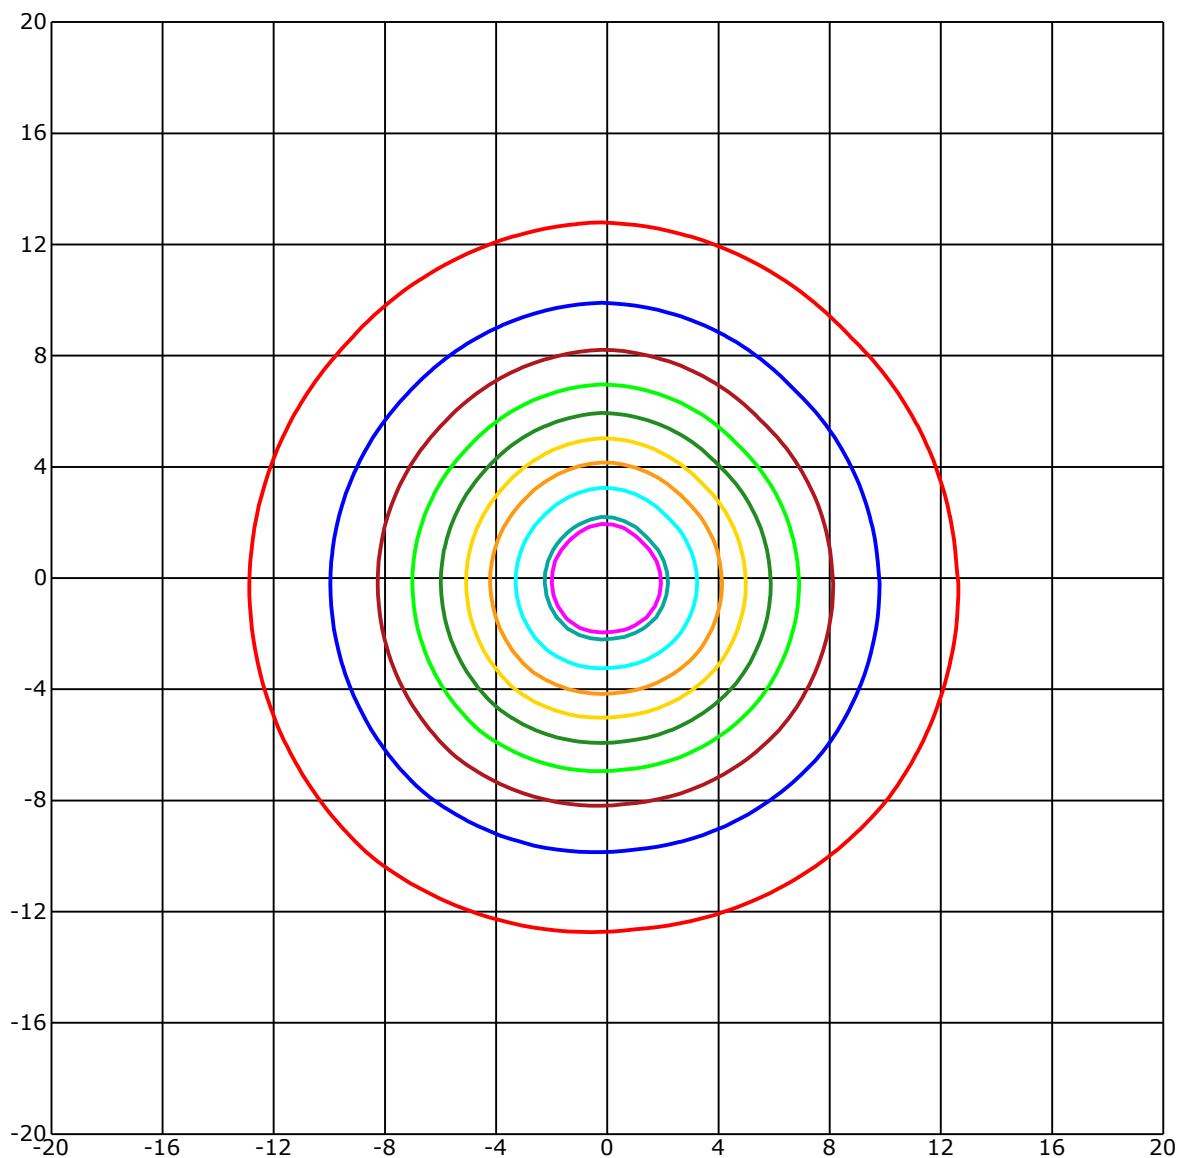

Unit of illumination: lx      Height of plane: 10.0(m)/32.81(ft)

|                 |                |
|-----------------|----------------|
| 16.984(92%Emax) | 9.231(50%Emax) |
| 16.615(90%Emax) | 7.385(40%Emax) |
| 14.769(80%Emax) | 5.538(30%Emax) |
| 12.923(70%Emax) | 3.692(20%Emax) |
| 11.077(60%Emax) | 1.846(10%Emax) |


C Range: 0 - 360 Deg  
C Interval: 45.0 Deg  
Test Speed: High  
Temperature: 25  
Operators: QC01  
Test Date: 2024/9/6 15:52:58

G Range: 0 - 90 Deg  
G Interval: 1.0 Deg  
Test System: Huipu CPM-1600B Goniophotometer  
Humidity: 60  
Test Distance: 6.71 m  
Remarks:

Report No.:

Test Time: 2024/9/6 15:52:58

## UTILIZATION FACTOR DIAGRAM (ROAD)

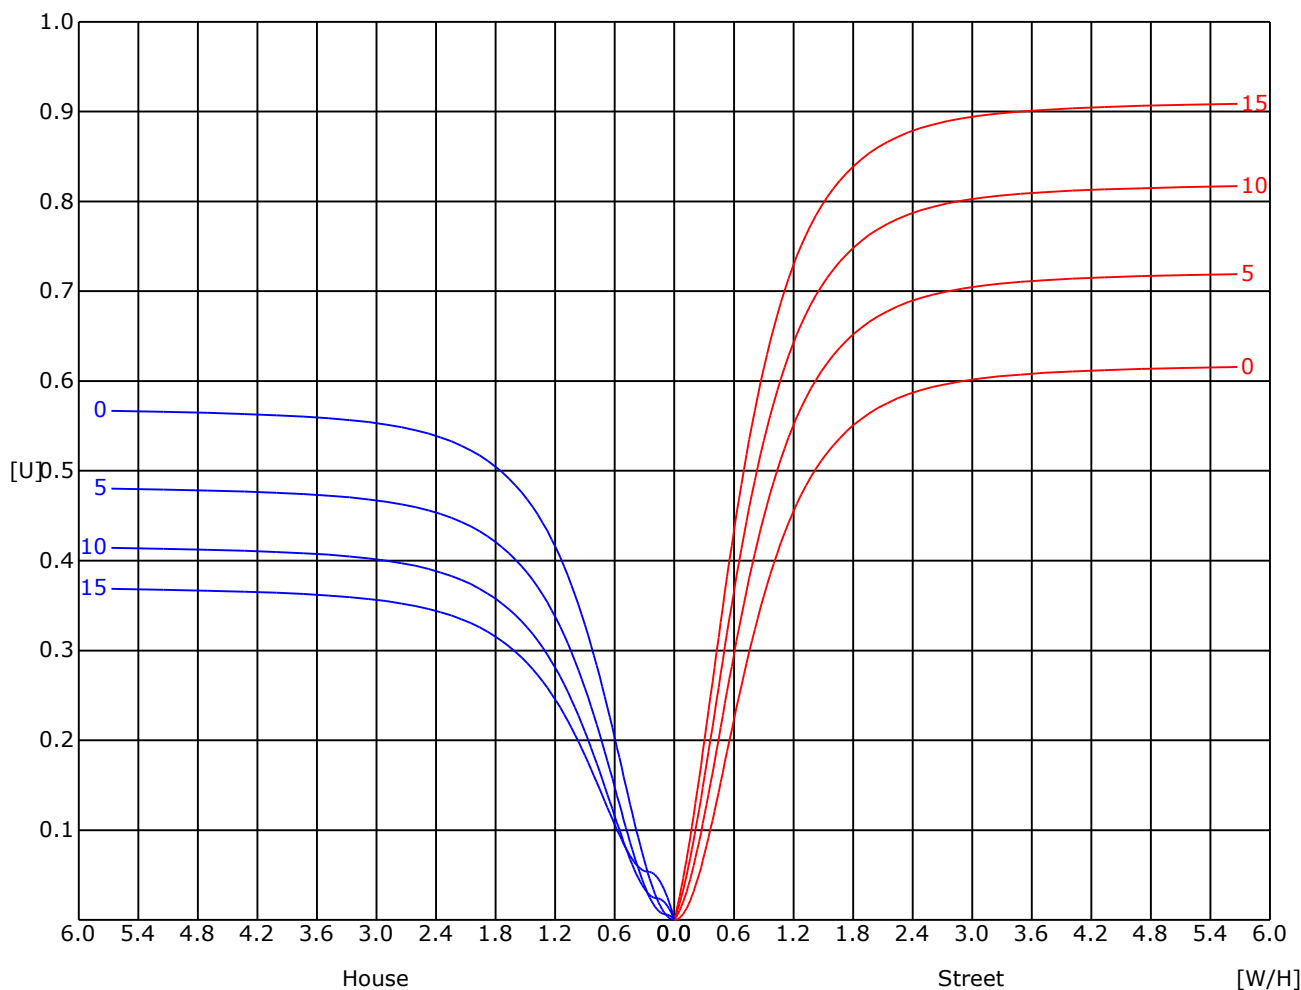


C Range: 0 - 360 Deg  
C Interval: 45.0 Deg  
Test Speed: High  
Temperature: 25  
Operators: QC01  
Test Date: 2024/9/6 15:52:58

G Range: 0 - 90 Deg  
G Interval: 1.0 Deg  
Test System: Huipu CPM-1600B Goniophotometer  
Humidity: 60  
Test Distance: 6.71 m  
Remarks:

Report No.:

Test Time: 2024/9/6 15:52:58

## LX-DISTANCE DIAGRAM

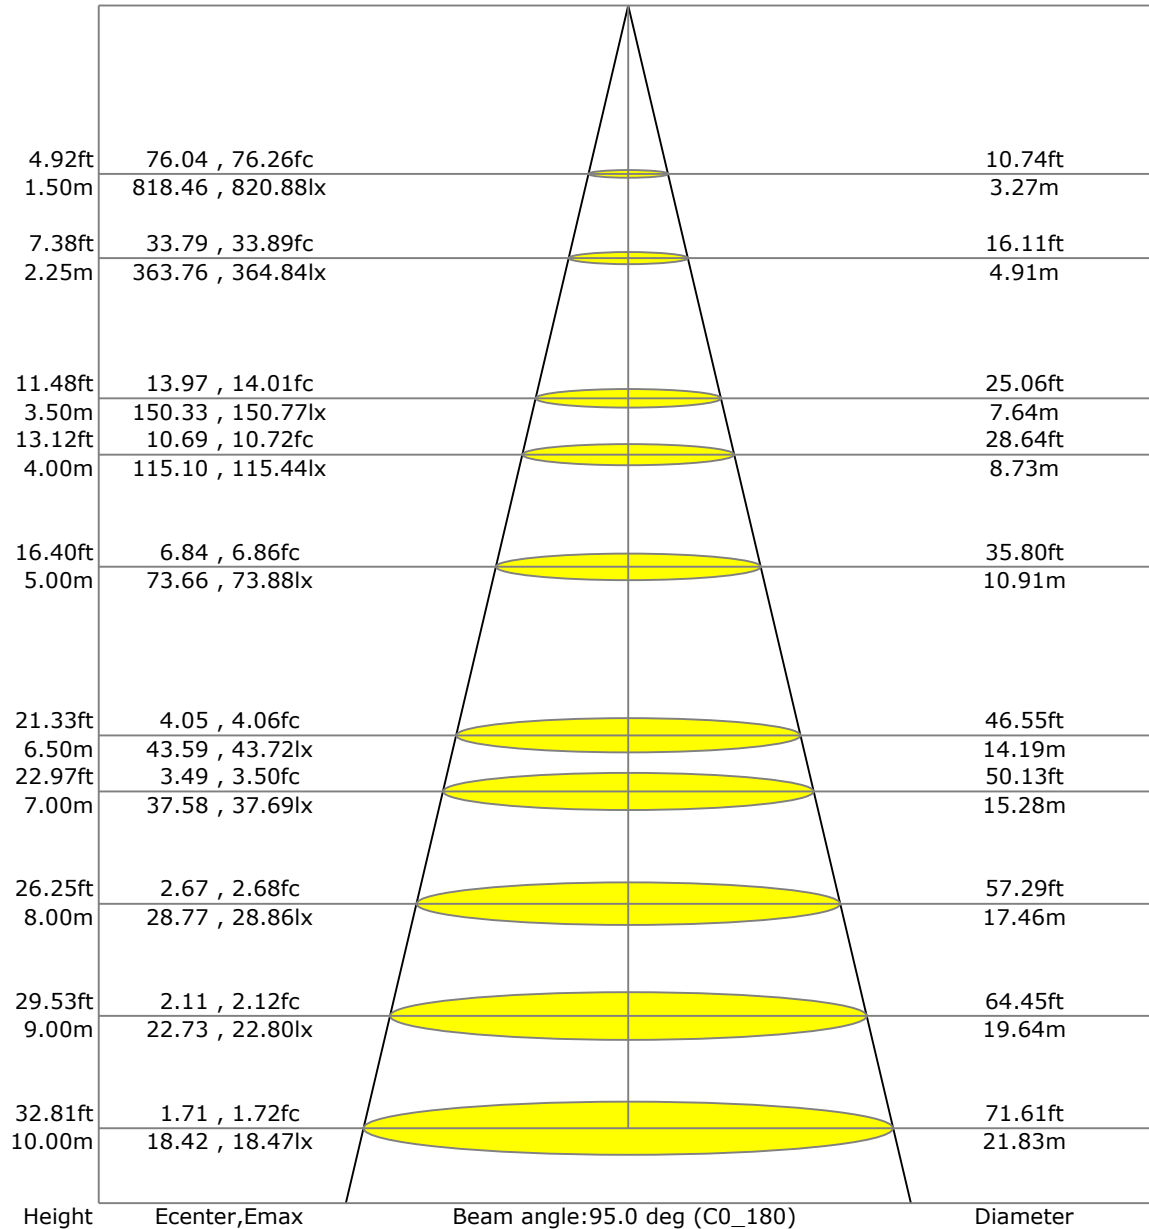

C Range: 0 - 360 Deg  
C Interval: 45.0 Deg  
Test Speed: High  
Temperature: 25  
Operators: QC01  
Test Date: 2024/9/6 15:52:58

G Range: 0 - 90 Deg  
G Interval: 1.0 Deg  
Test System: Huipu CPM-1600B Goniophotometer  
Humidity: 60  
Test Distance: 6.71 m  
Remarks:

Report No.:

Test Time: 2024/9/6 15:52:58

UGR(Unified Glare Rating) TABLE

|                  |                |       |       |       |       |                  |       |       |       |       |
|------------------|----------------|-------|-------|-------|-------|------------------|-------|-------|-------|-------|
| RHOCC            | 70             | 70    | 50    | 50    | 30    | 70               | 70    | 50    | 50    | 30    |
| RHOW             | 50             | 30    | 50    | 30    | 30    | 50               | 30    | 50    | 30    | 30    |
| RHOF             | 20             | 20    | 20    | 20    | 20    | 20               | 20    | 20    | 20    | 20    |
| Room Size<br>X Y | Viewed Endwise |       |       |       |       | Viewed Crosswise |       |       |       |       |
| 2H 2H            | 15.87          | 15.94 | 16.07 | 16.13 | 16.37 | 15.98            | 16.05 | 16.18 | 16.24 | 16.48 |
| 3H               | 15.90          | 15.97 | 16.11 | 16.16 | 16.41 | 16.00            | 16.07 | 16.21 | 16.27 | 16.51 |
| 4H               | 15.89          | 15.95 | 16.10 | 16.15 | 16.40 | 15.99            | 16.05 | 16.20 | 16.25 | 16.50 |
| 6H               | 15.86          | 15.93 | 16.08 | 16.13 | 16.38 | 15.96            | 16.02 | 16.18 | 16.23 | 16.48 |
| 8H               | 15.85          | 15.91 | 16.07 | 16.11 | 16.37 | 15.95            | 16.01 | 16.16 | 16.21 | 16.47 |
| 12H              | 15.83          | 15.89 | 16.05 | 16.10 | 16.35 | 15.93            | 15.99 | 16.15 | 16.20 | 16.45 |
| 4H 2H            | 16.79          | 16.86 | 17.00 | 17.05 | 17.30 | 17.02            | 17.08 | 17.23 | 17.28 | 17.53 |
| 3H               | 16.86          | 16.92 | 17.08 | 17.13 | 17.38 | 17.08            | 17.14 | 17.30 | 17.34 | 17.60 |
| 4H               | 16.85          | 16.91 | 17.08 | 17.12 | 17.38 | 17.06            | 17.12 | 17.29 | 17.34 | 17.59 |
| 6H               | 16.83          | 16.88 | 17.06 | 17.10 | 17.37 | 17.04            | 17.09 | 17.28 | 17.31 | 17.58 |
| 8H               | 16.81          | 16.86 | 17.05 | 17.09 | 17.36 | 17.02            | 17.07 | 17.26 | 17.30 | 17.57 |
| 12H              | 16.79          | 16.84 | 17.04 | 17.07 | 17.34 | 17.00            | 17.05 | 17.25 | 17.28 | 17.55 |
| 8H 4H            | 16.86          | 16.92 | 17.08 | 17.13 | 17.38 | 17.11            | 17.18 | 17.33 | 17.38 | 17.63 |
| 6H               | 16.95          | 16.99 | 17.20 | 17.23 | 17.51 | 17.19            | 17.24 | 17.45 | 17.48 | 17.75 |
| 8H               | 16.93          | 16.98 | 17.19 | 17.22 | 17.50 | 17.18            | 17.22 | 17.44 | 17.47 | 17.74 |
| 12H              | 16.91          | 16.95 | 17.18 | 17.21 | 17.49 | 17.16            | 17.20 | 17.43 | 17.45 | 17.73 |
| 12H 4H           | 16.98          | 17.03 | 17.23 | 17.26 | 17.53 | 17.25            | 17.30 | 17.49 | 17.53 | 17.80 |
| 6H               | 16.97          | 17.01 | 17.23 | 17.26 | 17.54 | 17.24            | 17.28 | 17.50 | 17.53 | 17.80 |

C Range: 0 - 360 Deg  
C Interval: 45.0 Deg  
Test Speed: High  
Temperature: 25  
Operators: QC01  
Test Date: 2024/9/6 15:52:58

G Range: 0 - 90 Deg  
G Interval: 1.0 Deg  
Test System: Huipu CPM-1600B Goniophotometer  
Humidity: 60  
Test Distance: 6.71 m  
Remarks:



## ZONAL LUMINOUS FLUX TABLE

[illegible]


C Range: 0 - 360 Deg  
C Interval: 45.0 Deg  
Test Speed: High  
Temperature: 25  
Operators: QC01  
Test Date: 2024/9/6 15:52:58

G Range: 0 - 90 Deg  
G Interval: 1.0 Deg  
Test System: Huipu CPM-1600B Goniophotometer  
Humidity: 60  
Test Distance: 6.71 m  
Remarks:

Report No.:

Test Time: 2024/9/6 15:52:58

## SPACE ISOLX DIAGRAM

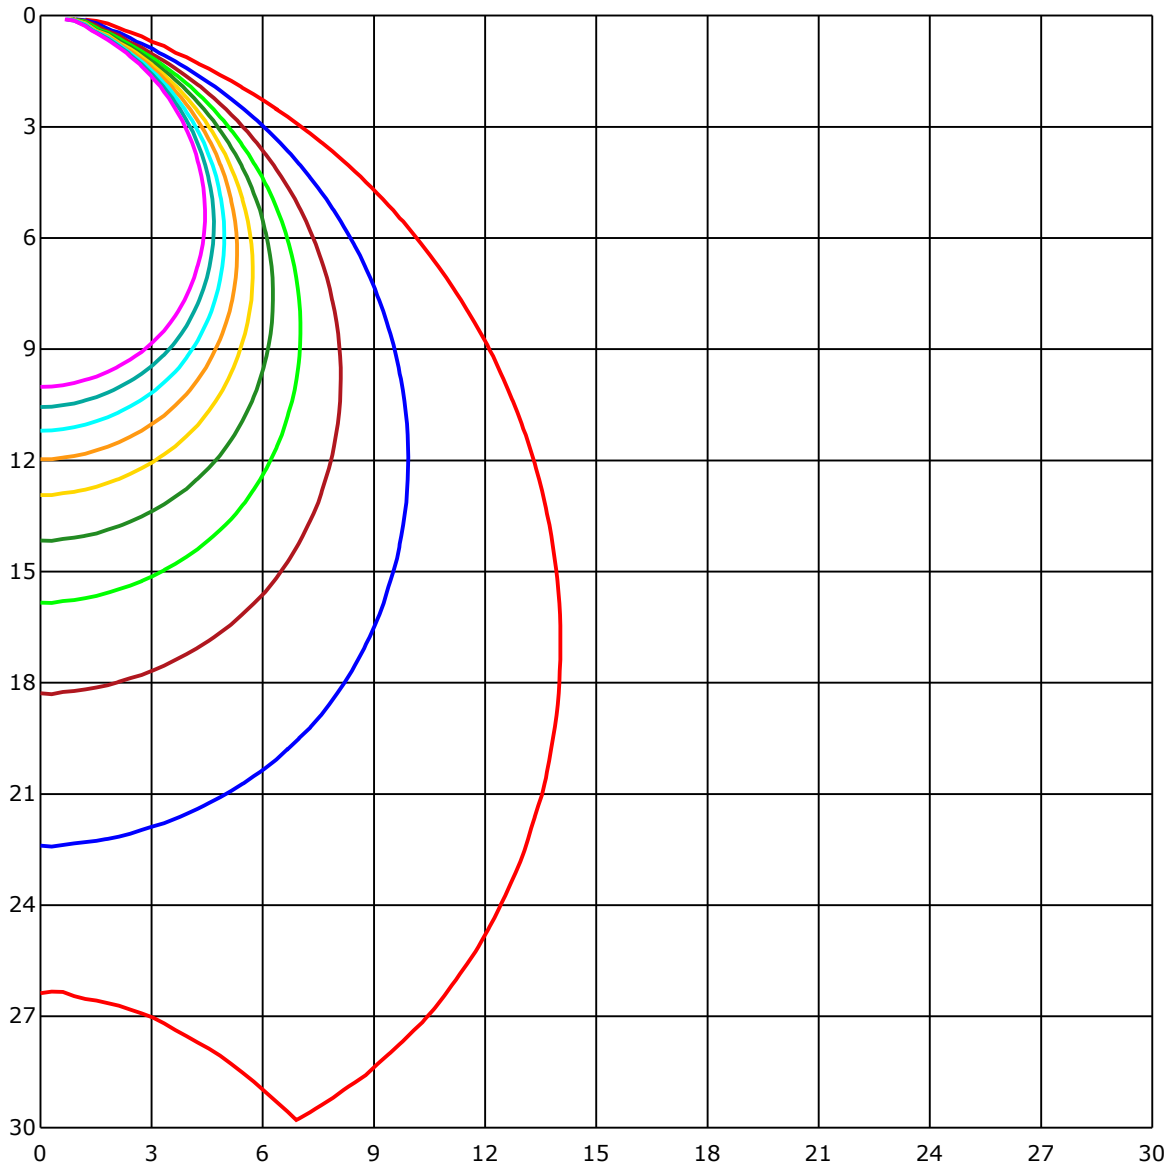

Unit of illumination:lx

18.359

16.523

14.687

12.851

11.015

9.18

7.344

5.508

3.672

1.836

C Range: 0 - 360 Deg

C Interval: 45.0 Deg

Test Speed: High

Temperature: 25

Operators: QC01

Test Date: 2024/9/6 15:52:58

G Range: 0 - 90 Deg

G Interval: 1.0 Deg

Test System: Huipu CPM-1600B Goniophotometer

Humidity: 60

Test Distance: 6.71 m

Remarks:

Report No.:

Test Time: 2024/9/6 15:52:58

## LUMINOUS DISTRIBUTION INTENSITY DATA

| Gamma\C | C0      | C45     | C90     | C135    | C180    | C225    | C270    | C315    | C360    |  |
|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|--|
| G0      | 1841.53 | 1837.21 | 1835.5  | 1841.49 | 1841.53 | 1837.21 | 1835.5  | 1841.49 | 1841.53 |  |
| G1      | 1846.98 | 1830.73 | 1835.09 | 1839.05 | 1840.41 | 1833.61 | 1835.05 | 1838.96 | 1846.98 |  |
| G2      | 1835.81 | 1826.09 | 1835.18 | 1834.46 | 1838.56 | 1837.16 | 1836.35 | 1838.24 | 1835.81 |  |
| G3      | 1834.51 | 1822.04 | 1833.25 | 1834.46 | 1841.13 | 1835.81 | 1831.36 | 1837.93 | 1834.51 |  |
| G4      | 1832.17 | 1818.57 | 1829.15 | 1829.55 | 1835.9  | 1833.52 | 1833.47 | 1835.41 | 1832.17 |  |
| G5      | 1827.89 | 1811.37 | 1826.76 | 1825.23 | 1834.01 | 1831.85 | 1828.52 | 1833.65 | 1827.89 |  |
| G6      | 1824.15 | 1806.23 | 1823.43 | 1818.88 | 1828.47 | 1831.67 | 1823.7  | 1828.25 | 1824.15 |  |
| G7      | 1814.2  | 1798.89 | 1819.42 | 1814.16 | 1827.48 | 1826.99 | 1818.03 | 1821.95 | 1814.2  |  |
| G8      | 1807.27 | 1793.54 | 1809.61 | 1808.75 | 1817.98 | 1823.97 | 1808.98 | 1816.18 | 1807.27 |  |
| G9      | 1802.54 | 1781.02 | 1804.25 | 1802.36 | 1810.28 | 1816.23 | 1803.44 | 1810.96 | 1802.54 |  |
| G10     | 1793.04 | 1772.91 | 1796.55 | 1790.43 | 1803.08 | 1813.12 | 1795.65 | 1801.14 | 1793.04 |  |
| G11     | 1783.9  | 1762.69 | 1790.7  | 1782.86 | 1798.98 | 1805.02 | 1788.27 | 1795.88 | 1783.9  |  |
| G12     | 1772.87 | 1752.92 | 1777.91 | 1774.36 | 1786.51 | 1798.67 | 1776.47 | 1785.75 | 1772.87 |  |
| G13     | 1763.82 | 1738.56 | 1769.27 | 1764.86 | 1778.32 | 1788.13 | 1765.13 | 1777.51 | 1763.82 |  |
| G14     | 1752.43 | 1728.7  | 1758.69 | 1752.47 | 1768.1  | 1783.04 | 1756.57 | 1764.99 | 1752.43 |  |
| G15     | 1741.71 | 1713.03 | 1748.78 | 1740.36 | 1758.51 | 1772.06 | 1742.43 | 1755.45 | 1741.71 |  |
| G16     | 1726.58 | 1702.59 | 1735.72 | 1726.36 | 1745.95 | 1761.79 | 1730.19 | 1742.61 | 1726.58 |  |
| G17     | 1719.02 | 1685.39 | 1721.86 | 1712.67 | 1733.52 | 1749.46 | 1716.81 | 1732.66 | 1719.02 |  |
| G18     | 1698.85 | 1668.55 | 1710.47 | 1697.0  | 1720.1  | 1737.57 | 1705.51 | 1718.3  | 1698.85 |  |
| G19     | 1684.71 | 1651.93 | 1694.93 | 1683.32 | 1708.4  | 1724.74 | 1688.27 | 1705.65 | 1684.71 |  |
| G20     | 1667.29 | 1637.21 | 1681.52 | 1671.34 | 1690.52 | 1713.75 | 1672.6  | 1688.36 | 1667.29 |  |
| G21     | 1653.65 | 1613.89 | 1663.51 | 1650.72 | 1675.3  | 1695.88 | 1656.53 | 1675.39 | 1653.65 |  |
| G22     | 1633.52 | 1592.95 | 1647.12 | 1630.64 | 1658.42 | 1682.37 | 1641.13 | 1655.99 | 1633.52 |  |
| G23     | 1610.87 | 1570.94 | 1626.72 | 1613.8  | 1643.11 | 1666.43 | 1620.15 | 1639.55 | 1610.87 |  |
| G24     | 1589.13 | 1548.78 | 1606.1  | 1590.88 | 1621.72 | 1652.11 | 1599.17 | 1618.03 | 1589.13 |  |
| G25     | 1568.73 | 1523.35 | 1584.58 | 1565.8  | 1598.22 | 1628.48 | 1575.89 | 1596.96 | 1568.73 |  |
| G26     | 1543.29 | 1499.39 | 1563.15 | 1542.17 | 1577.06 | 1610.42 | 1555.63 | 1573.64 | 1543.29 |  |
| G27     | 1518.93 | 1472.51 | 1539.1  | 1519.83 | 1555.45 | 1587.82 | 1528.43 | 1552.7  | 1518.93 |  |
| G28     | 1492.46 | 1446.9  | 1517.63 | 1493.22 | 1531.99 | 1567.6  | 1503.49 | 1528.75 | 1492.46 |  |
| G29     | 1468.19 | 1418.57 | 1489.67 | 1467.97 | 1507.86 | 1541.76 | 1477.33 | 1502.77 | 1468.19 |  |
| G30     | 1442.53 | 1390.52 | 1464.81 | 1438.84 | 1479.04 | 1517.04 | 1454.19 | 1475.76 | 1442.53 |  |
| G31     | 1411.1  | 1363.24 | 1436.31 | 1414.52 | 1454.73 | 1491.74 | 1422.94 | 1451.17 | 1411.1  |  |
| G32     | 1382.33 | 1335.64 | 1409.12 | 1385.75 | 1425.73 | 1466.21 | 1398.4  | 1423.84 | 1382.33 |  |
| G33     | 1358.96 | 1304.44 | 1381.07 | 1356.35 | 1399.03 | 1437.08 | 1367.56 | 1396.6  | 1358.96 |  |
| G34     | 1327.18 | 1279.45 | 1356.89 | 1326.5  | 1369.99 | 1412.18 | 1339.83 | 1365.49 | 1327.18 |  |
| G35     | 1296.29 | 1246.81 | 1323.84 | 1298.14 | 1342.89 | 1381.93 | 1308.36 | 1337.49 | 1296.29 |  |
| G36     | 1267.29 | 1215.92 | 1294.53 | 1268.28 | 1310.83 | 1355.05 | 1278.59 | 1308.54 | 1267.29 |  |

C Range: 0 - 360 Deg

C Interval: 45.0 Deg

Test Speed: High

Temperature: 25

Operators: QC01

Test Date: 2024/9/6 15:52:58

G Range: 0 - 90 Deg

G Interval: 1.0 Deg

Test System: Huipu CPM-1600B Goniophotometer

Humidity: 60

Test Distance: 6.71 m

Remarks:

Report No.:

Test Time: 2024/9/6 15:52:58

## LUMINOUS DISTRIBUTION INTENSITY DATA(Continue 1)

| Gamma\C | C0      | C45     | C90     | C135    | C180    | C225    | C270    | C315    | C360    |  |
|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|--|
| G37     | 1237.94 | 1183.1  | 1265.9  | 1238.39 | 1283.95 | 1324.07 | 1250.63 | 1279.63 | 1237.94 |  |
| G38     | 1204.85 | 1153.61 | 1237.35 | 1206.74 | 1251.18 | 1295.84 | 1220.29 | 1247.57 | 1204.85 |  |
| G39     | 1174.0  | 1120.56 | 1204.67 | 1177.47 | 1224.66 | 1265.9  | 1187.83 | 1216.96 | 1174.0  |  |
| G40     | 1141.59 | 1089.63 | 1175.08 | 1145.01 | 1190.8  | 1235.73 | 1156.35 | 1186.3  | 1141.59 |  |
| G41     | 1110.84 | 1057.17 | 1142.22 | 1112.05 | 1160.5  | 1204.44 | 1125.06 | 1157.57 | 1110.84 |  |
| G42     | 1078.1  | 1025.47 | 1110.84 | 1078.96 | 1126.77 | 1175.71 | 1094.85 | 1122.45 | 1078.1  |  |
| G43     | 1044.51 | 991.7   | 1078.37 | 1048.39 | 1095.98 | 1142.58 | 1058.43 | 1091.07 | 1044.51 |  |
| G44     | 1011.11 | 959.96  | 1047.53 | 1016.91 | 1062.84 | 1111.96 | 1026.55 | 1057.71 | 1011.11 |  |
| G45     | 978.96  | 926.73  | 1014.08 | 983.1   | 1032.54 | 1077.34 | 993.01  | 1027.23 | 978.96  |  |
| G46     | 945.42  | 895.35  | 983.28  | 950.37  | 999.04  | 1045.28 | 962.66  | 993.32  | 945.42  |  |
| G47     | 912.23  | 863.88  | 948.7   | 919.08  | 966.71  | 1013.49 | 927.36  | 961.04  | 912.23  |  |
| G48     | 879.82  | 829.16  | 917.05  | 885.85  | 934.93  | 980.49  | 897.65  | 927.77  | 879.82  |  |
| G49     | 846.45  | 796.88  | 884.23  | 851.45  | 901.92  | 947.17  | 862.53  | 894.67  | 846.45  |  |
| G50     | 812.28  | 763.38  | 852.53  | 818.4   | 867.57  | 915.3   | 829.03  | 861.76  | 812.28  |  |
| G51     | 779.59  | 731.78  | 818.45  | 786.62  | 836.05  | 881.8   | 794.72  | 828.13  | 779.59  |  |
| G52     | 745.46  | 697.6   | 786.03  | 752.67  | 803.0   | 849.74  | 762.98  | 794.5   | 745.46  |  |
| G53     | 714.67  | 663.61  | 752.76  | 720.16  | 771.31  | 816.33  | 729.57  | 763.38  | 714.67  |  |
| G54     | 680.27  | 631.24  | 719.8   | 686.8   | 735.51  | 783.6   | 695.76  | 728.76  | 680.27  |  |
| G55     | 646.01  | 597.51  | 686.03  | 654.47  | 703.68  | 749.79  | 660.77  | 695.4   | 646.01  |  |
| G56     | 612.06  | 565.91  | 653.43  | 621.11  | 670.81  | 717.41  | 627.91  | 661.18  | 612.06  |  |
| G57     | 580.0   | 533.45  | 621.02  | 589.14  | 638.26  | 683.11  | 596.3   | 628.36  | 580.0   |  |
| G58     | 547.36  | 502.56  | 589.23  | 556.54  | 605.03  | 651.05  | 563.61  | 595.4   | 547.36  |  |
| G59     | 514.76  | 470.55  | 556.27  | 524.94  | 573.11  | 618.0   | 529.8   | 563.48  | 514.76  |  |
| G60     | 483.2   | 439.75  | 523.5   | 492.38  | 540.83  | 585.31  | 498.6   | 530.07  | 483.2   |  |
| G61     | 452.0   | 407.42  | 491.89  | 461.05  | 509.09  | 552.04  | 466.09  | 498.37  | 452.0   |  |
| G62     | 419.98  | 377.62  | 460.33  | 428.81  | 476.54  | 520.93  | 435.43  | 466.49  | 419.98  |  |
| G63     | 391.21  | 346.69  | 428.9   | 398.28  | 446.1   | 488.51  | 402.56  | 434.44  | 391.21  |  |
| G64     | 359.92  | 317.74  | 398.28  | 367.08  | 416.16  | 457.4   | 372.08  | 403.64  | 359.92  |  |
| G65     | 331.2   | 288.33  | 365.96  | 336.78  | 384.46  | 425.48  | 342.18  | 373.25  | 331.2   |  |
| G66     | 300.99  | 260.28  | 335.92  | 306.93  | 352.49  | 395.4   | 312.56  | 342.95  | 300.99  |  |
| G67     | 272.13  | 232.86  | 306.39  | 278.79  | 322.91  | 363.97  | 282.71  | 313.1   | 272.13  |  |
| G68     | 243.4   | 207.29  | 277.89  | 251.01  | 293.06  | 333.94  | 255.11  | 284.01  | 243.4   |  |
| G69     | 217.87  | 182.53  | 249.43  | 223.9   | 264.25  | 303.28  | 228.63  | 256.32  | 217.87  |  |
| G70     | 192.48  | 159.03  | 223.36  | 198.2   | 236.6   | 274.56  | 202.34  | 228.9   | 192.48  |  |
| G71     | 167.53  | 137.19  | 197.12  | 174.15  | 210.13  | 246.6   | 177.12  | 202.74  | 167.53  |  |
| G72     | 145.02  | 117.33  | 172.89  | 150.83  | 184.6   | 219.9   | 154.57  | 177.35  | 145.02  |  |
| G73     | 124.94  | 100.4   | 149.8   | 129.35  | 160.87  | 193.6   | 132.82  | 154.93  | 124.94  |  |

C Range: 0 - 360 Deg

C Interval: 45.0 Deg

Test Speed: High

Temperature: 25

Operators: QC01

Test Date: 2024/9/6 15:52:58

G Range: 0 - 90 Deg

G Interval: 1.0 Deg

Test System: Huipu CPM-1600B Goniophotometer

Humidity: 60

Test Distance: 6.71 m

Remarks:

## LUMINOUS DISTRIBUTION INTENSITY DATA(Continue 2)

[illegible]

C Range: 0 - 360 Deg  
C Interval: 45.0 Deg  
Test Speed: High  
Temperature: 25  
Operators: QC01  
Test Date: 2024/9/6 15:52:58

G Range: 0 - 90 Deg  
G Interval: 1.0 Deg  
Test System: Huipu CPM-1600B Goniophotometer  
Humidity: 60  
Test Distance: 6.71 m  
Remarks: