

Job/Project

Location

Fixture Ref.

Quantity

Remarks

Product Description

Use high-performance SMD LED, Ra>80. Aluminum heatsink and unique die casting heatsink design ensure better heat dissipation.

Luminaire

Structure	Fixed Down Light LED
Model No.	IBDL225
Wattage	15 W 20W 25W 35W 42W
Luminous Flux	>100lm/W
Beam	100°
IP Ratings	IP20 IP54
Material	Die casting Aluminum
Finish	White black

Installation

Installation
Suitable for 5~18 mm thick ceiling board


LEDs

Brand	Osram Sanan TYF
Type	SMD
Color Temp	2700K 3000K 4000K 5000K 5700K 6500K
CRI	80 90

Control Gear

Remote constant current LED driver	
Brand	Eaglerise Osram Lifud
Input Voltage	220~240Vac 100-240Vac
Dimming	Non Dim Dim
Remarks	Flicker-free,PF 0.5 0.9

Photometrics

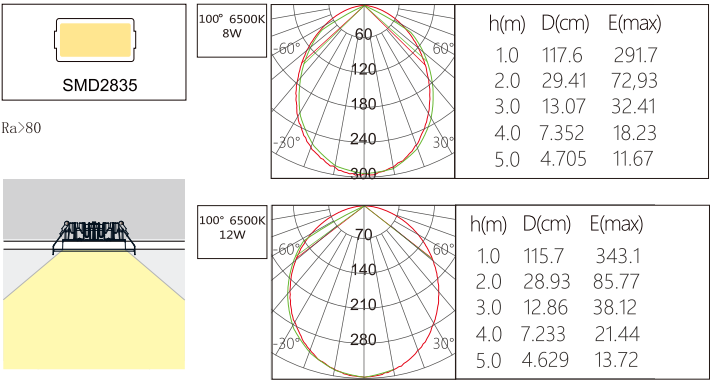

Picture



Line art

