

Product Description

Use high-performance SMD LED, Ra>80. Aluminum heatsink and unique die casting heatsink design ensure better heat dissipation.

Job/Project

Location

Fixture Ref.

Quantity

Remarks

Luminaire

Structure	Fixed Down Light LED
Model No.	IBDL229
Wattage	15W 20W 28W 40W
Luminous Flux	> 1350lm 2000lm 2800lm 4000lm
Beam	100°
IP Ratings	IP50 IP54
Material	Die casting aluminum heatsink
Finish	White black

Installation

Installation
Suitable for 5~18 mm thick ceiling board


LEDs

Brand	Osram Sanan
Type	SMD
Color Temp	2700K 3000K 3500K 4000K 5000K 5700K 6000K 6500K
CRI	80 90




Control Gear

Remote constant current LED driver	
Brand	Eaglerise Osram Lifud Tridonic
Input Voltage	220~240Vac 100-240Vac
Dimming	Non Dim Dim
Remarks	Flicker-free,PF 0.5 0.9

Photometrics



Ra>80

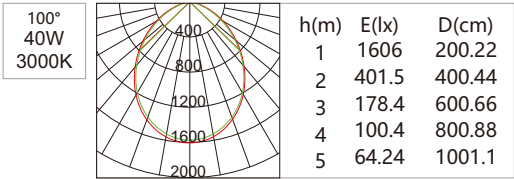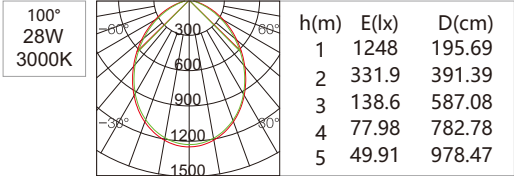

Picture

